



**BLACK
ONYX**
DECORATIVE LAMINATES



BLACK
ONYX
DECORATIVE LAMINATES

**BLACK
ONYX**

DECORATIVE LAMINATES



Create

story of
Decor with
Exotic Feel



Design

your space with
decorative laminate
collection

About

Staying true to our mission of bringing unique, modern, elegant and high-quality products to the market, proud to introduce its new Black Onyx 2023.

Consisting of eclectic designs manufactured with first-grade imported raw materials, these laminates can make spaces radiate boundless panache and poise.


Manufactured in our state-of-the-art factory, these tiles have passed stringent quality checks and that is a testament to their durability and superior quality.

With Black Onyx 2023, you have the complete freedom to create spell-binding decors that will showcase your legacy for years to come.





1138-HG

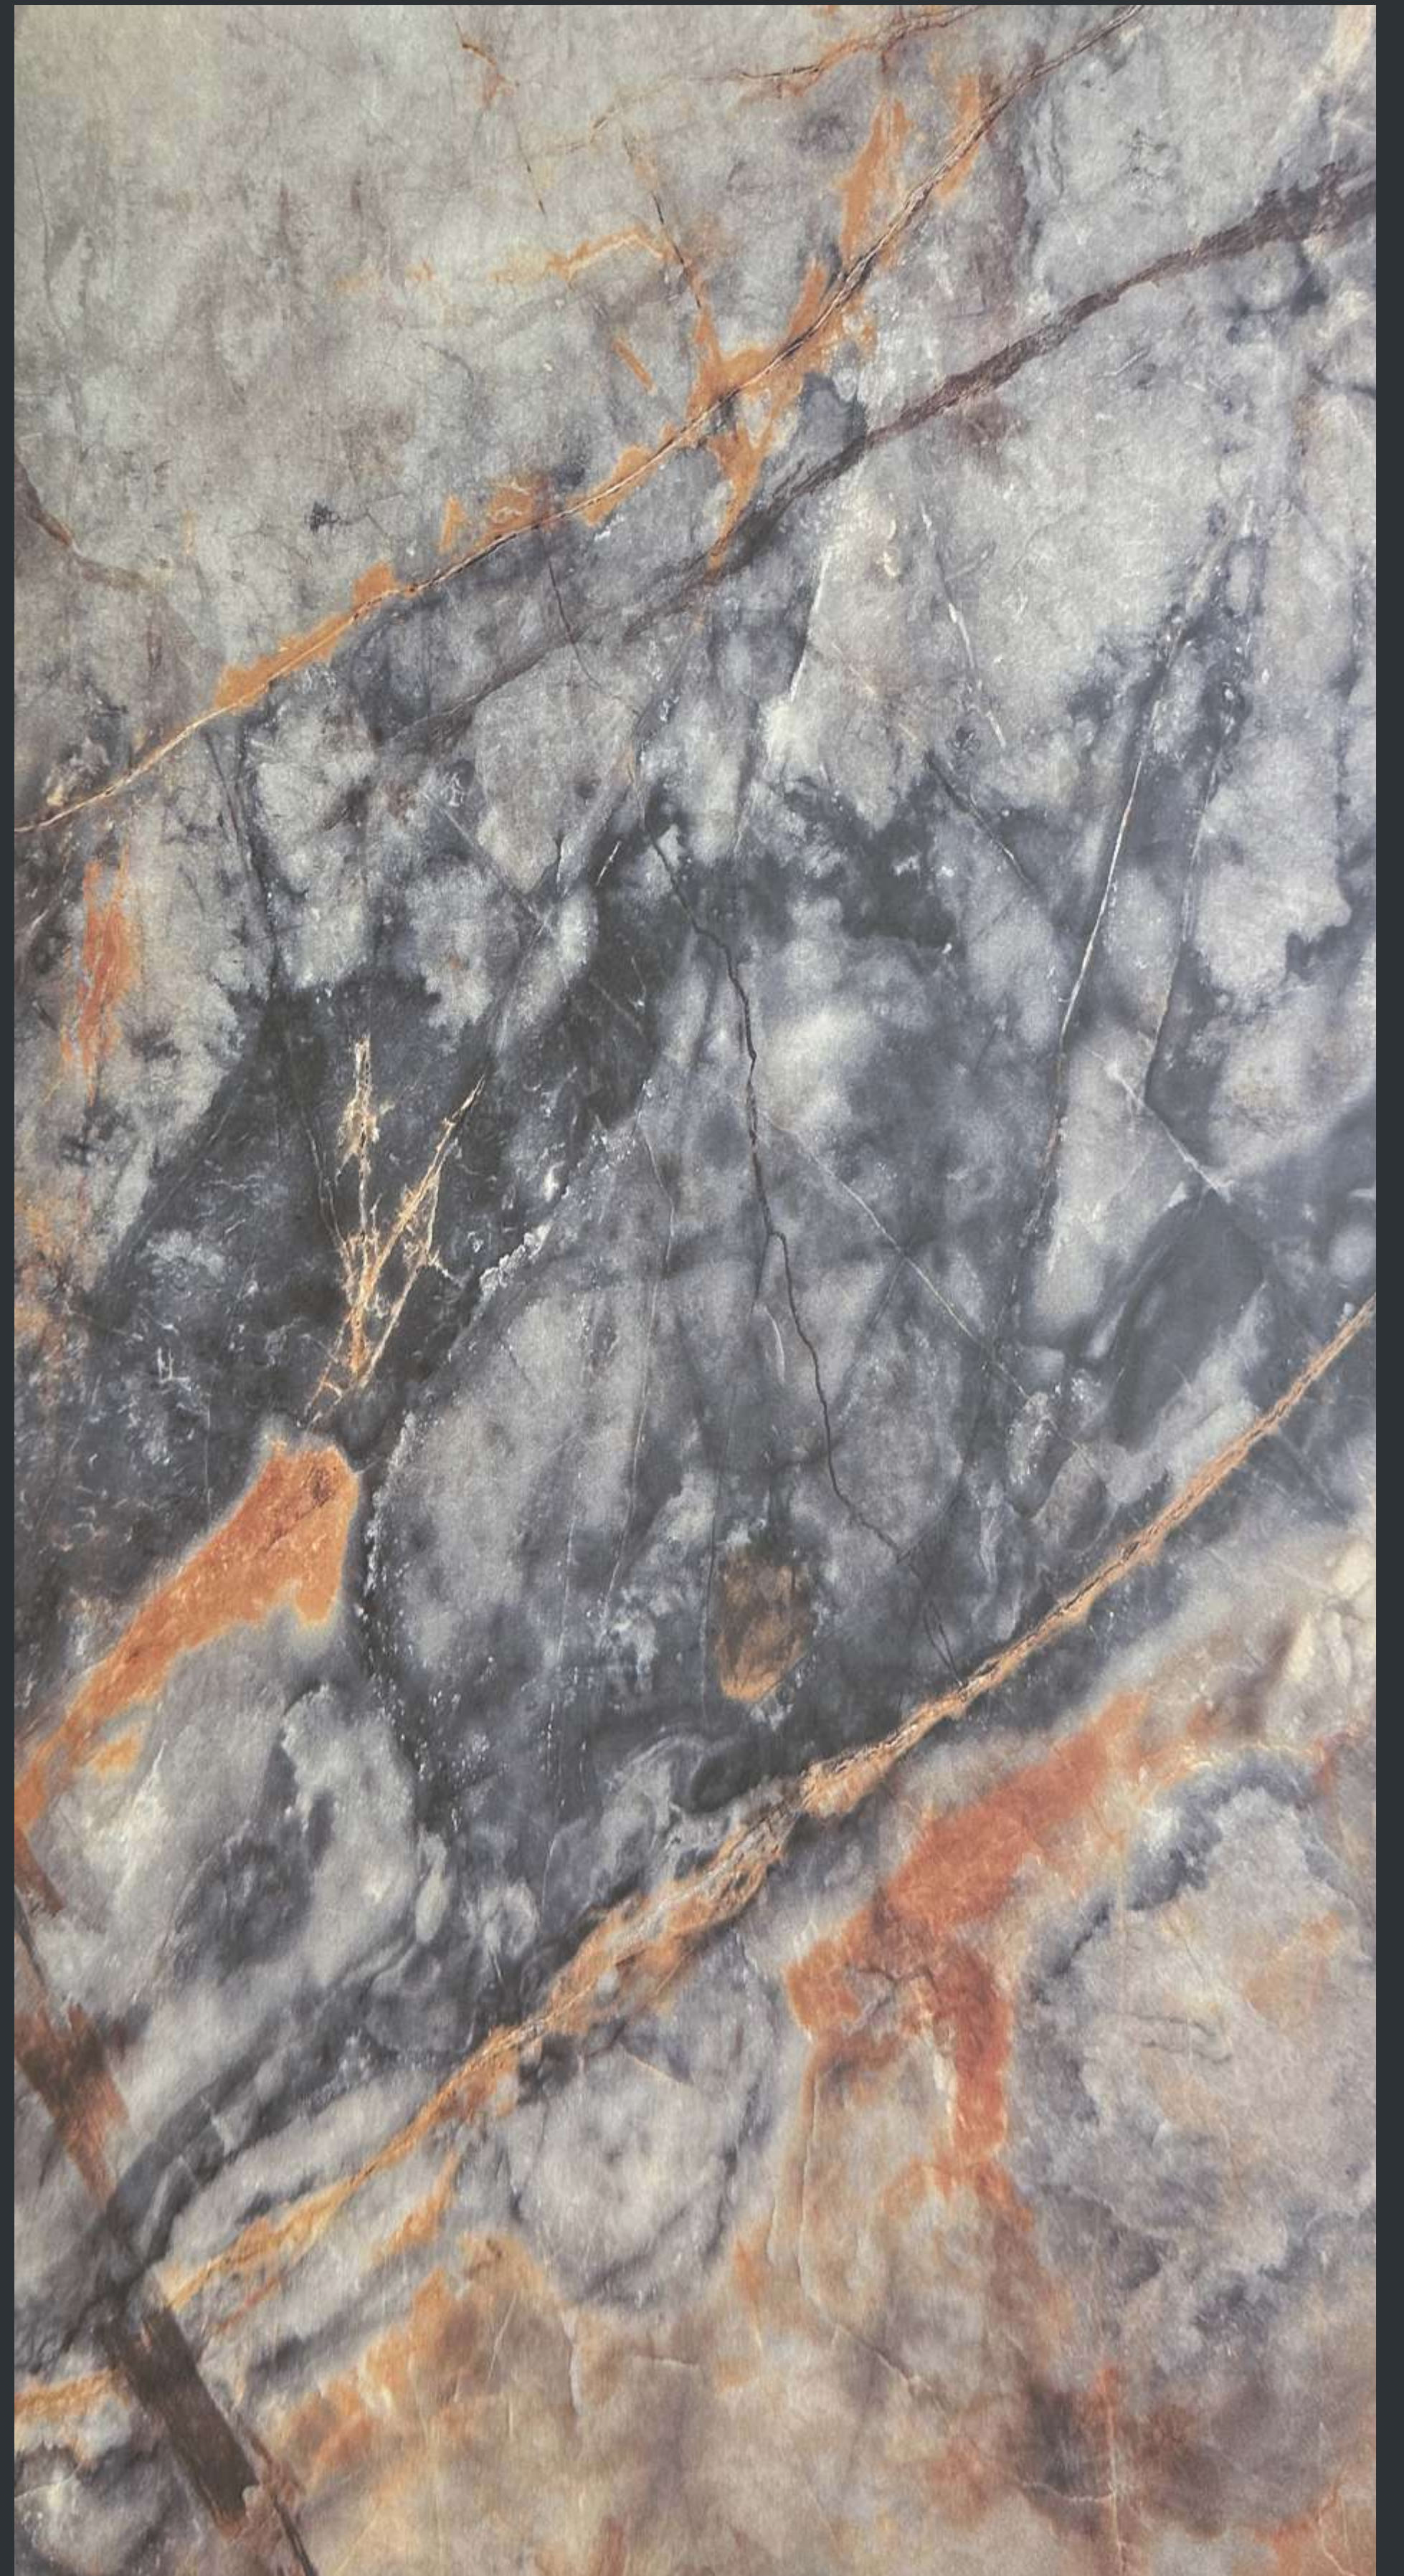

1138-SMT



1137-HG



1139-HG




1101-SMT



1102-SMT



1141-SMT

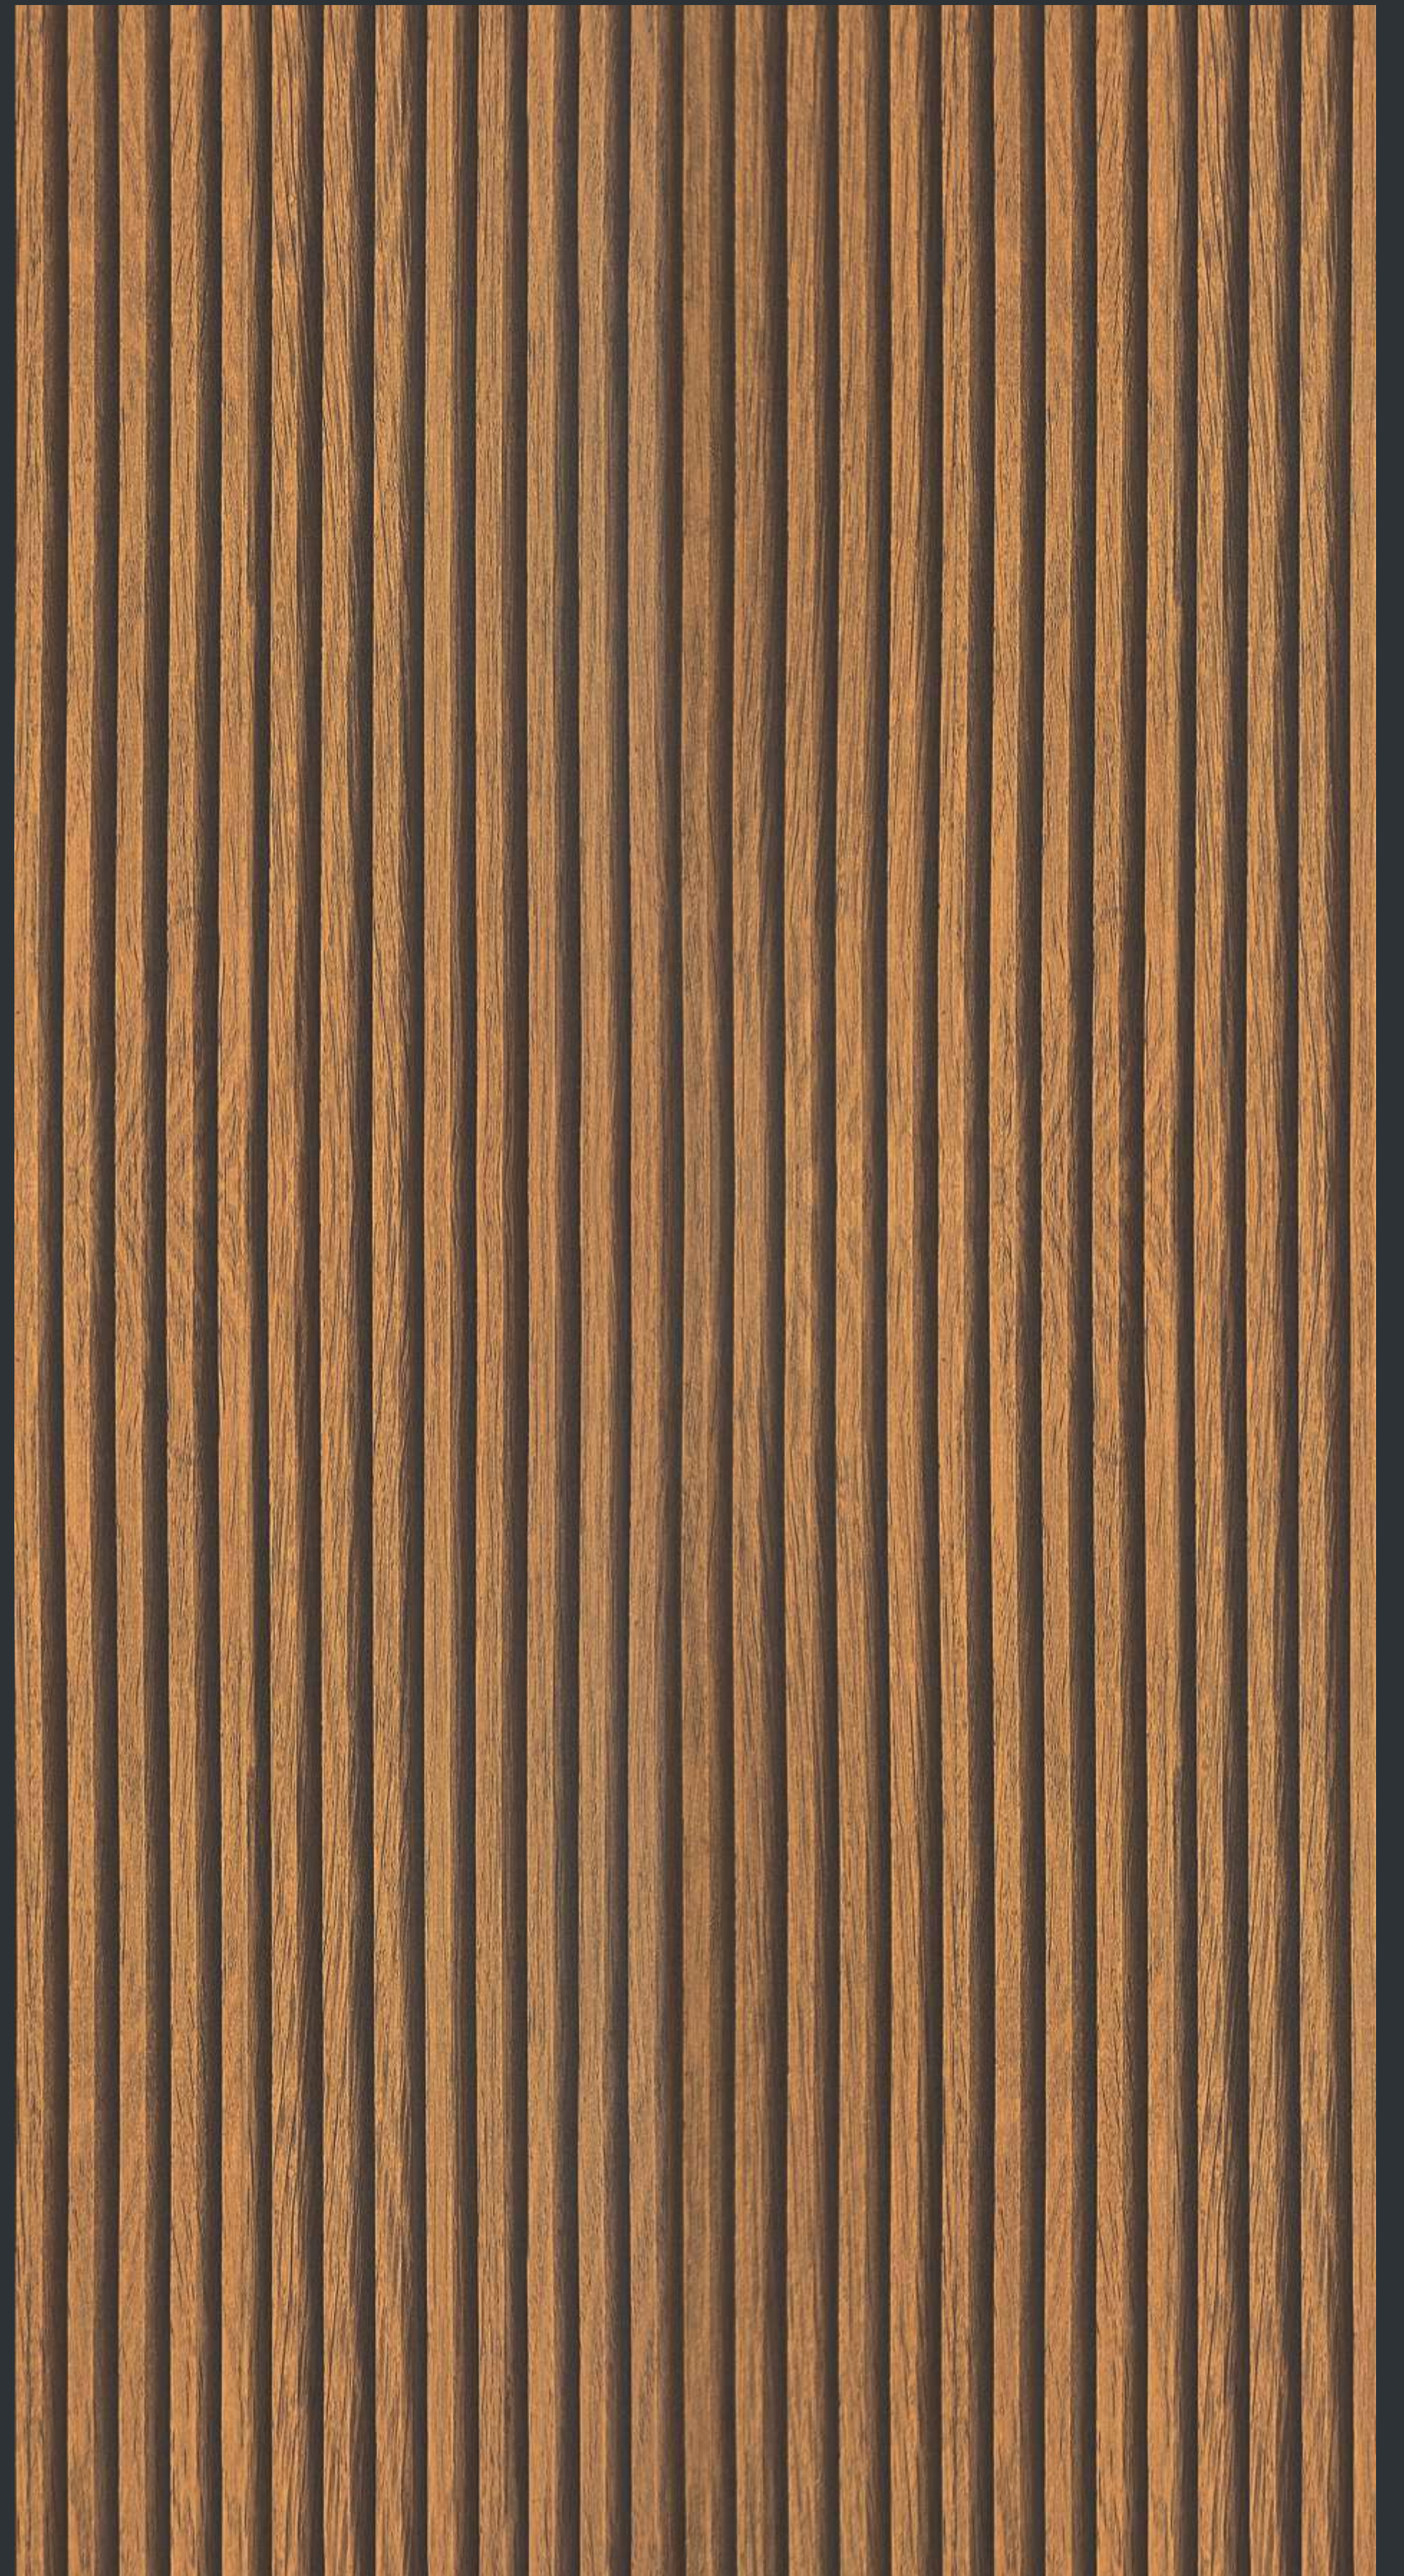

1140-SMT



1143-FT



1142-FT




1105-HG



1106-HG



1127-HG

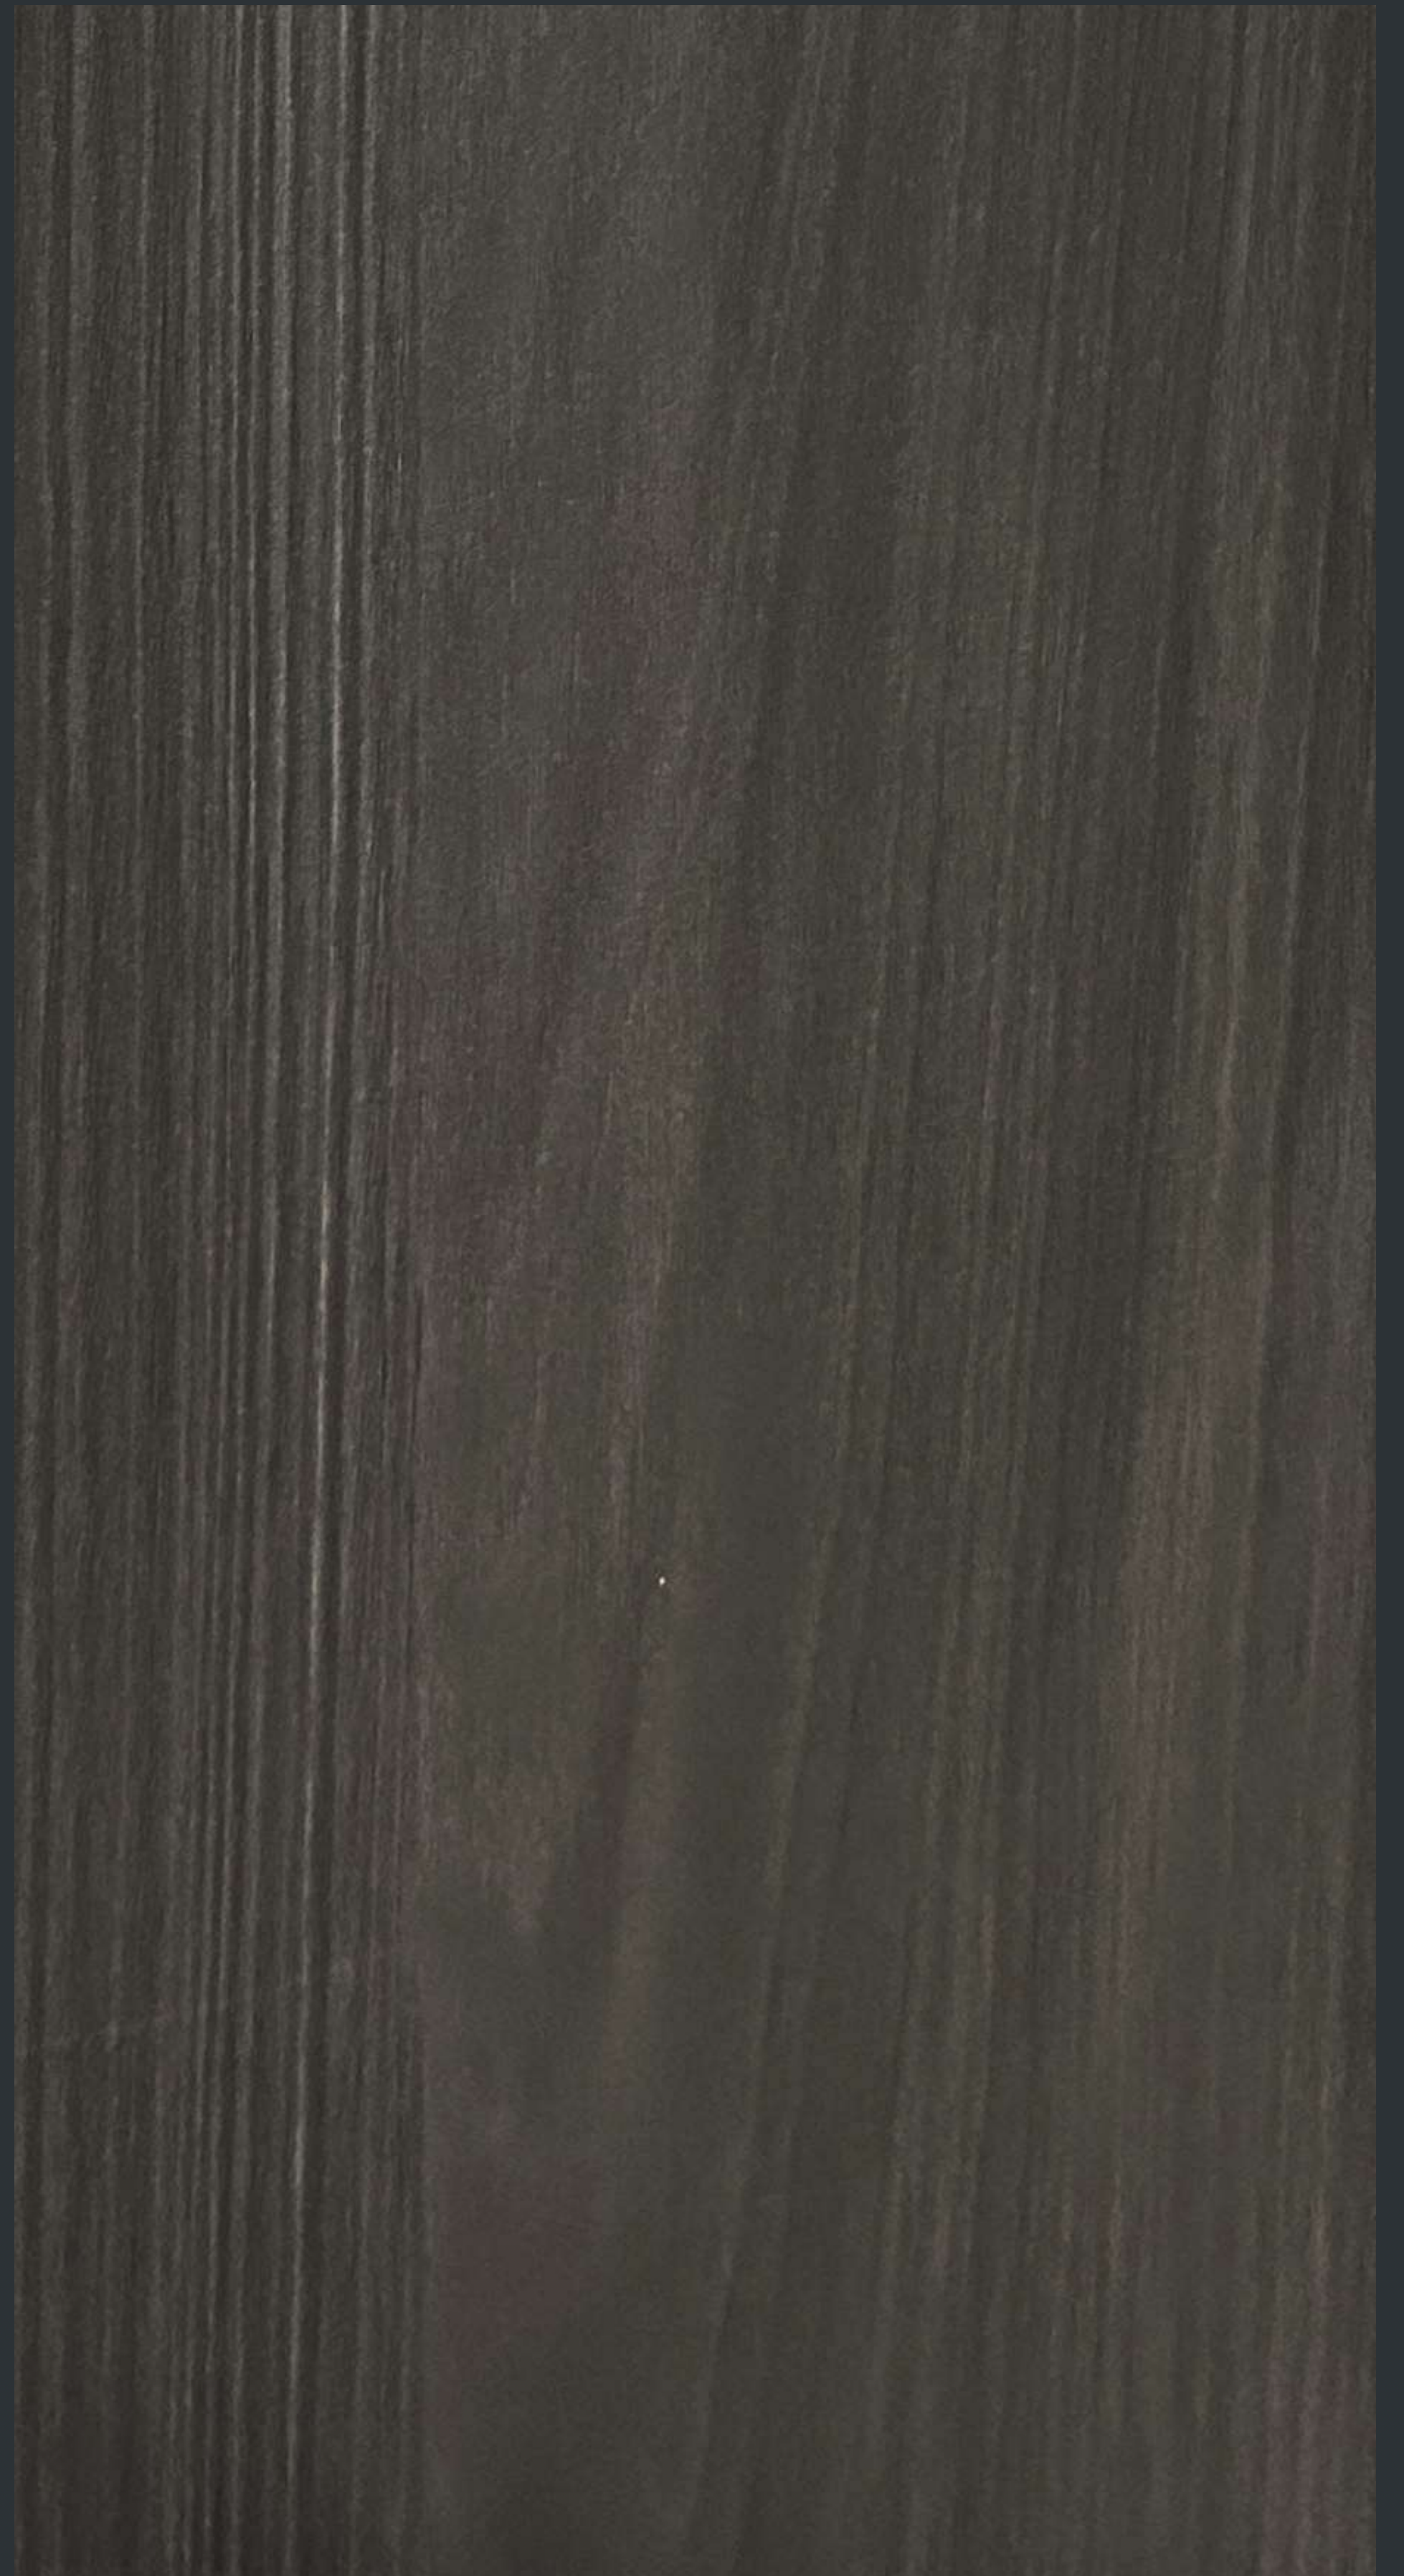

1116-HG




1109-FT



1110-FT



1104-UA

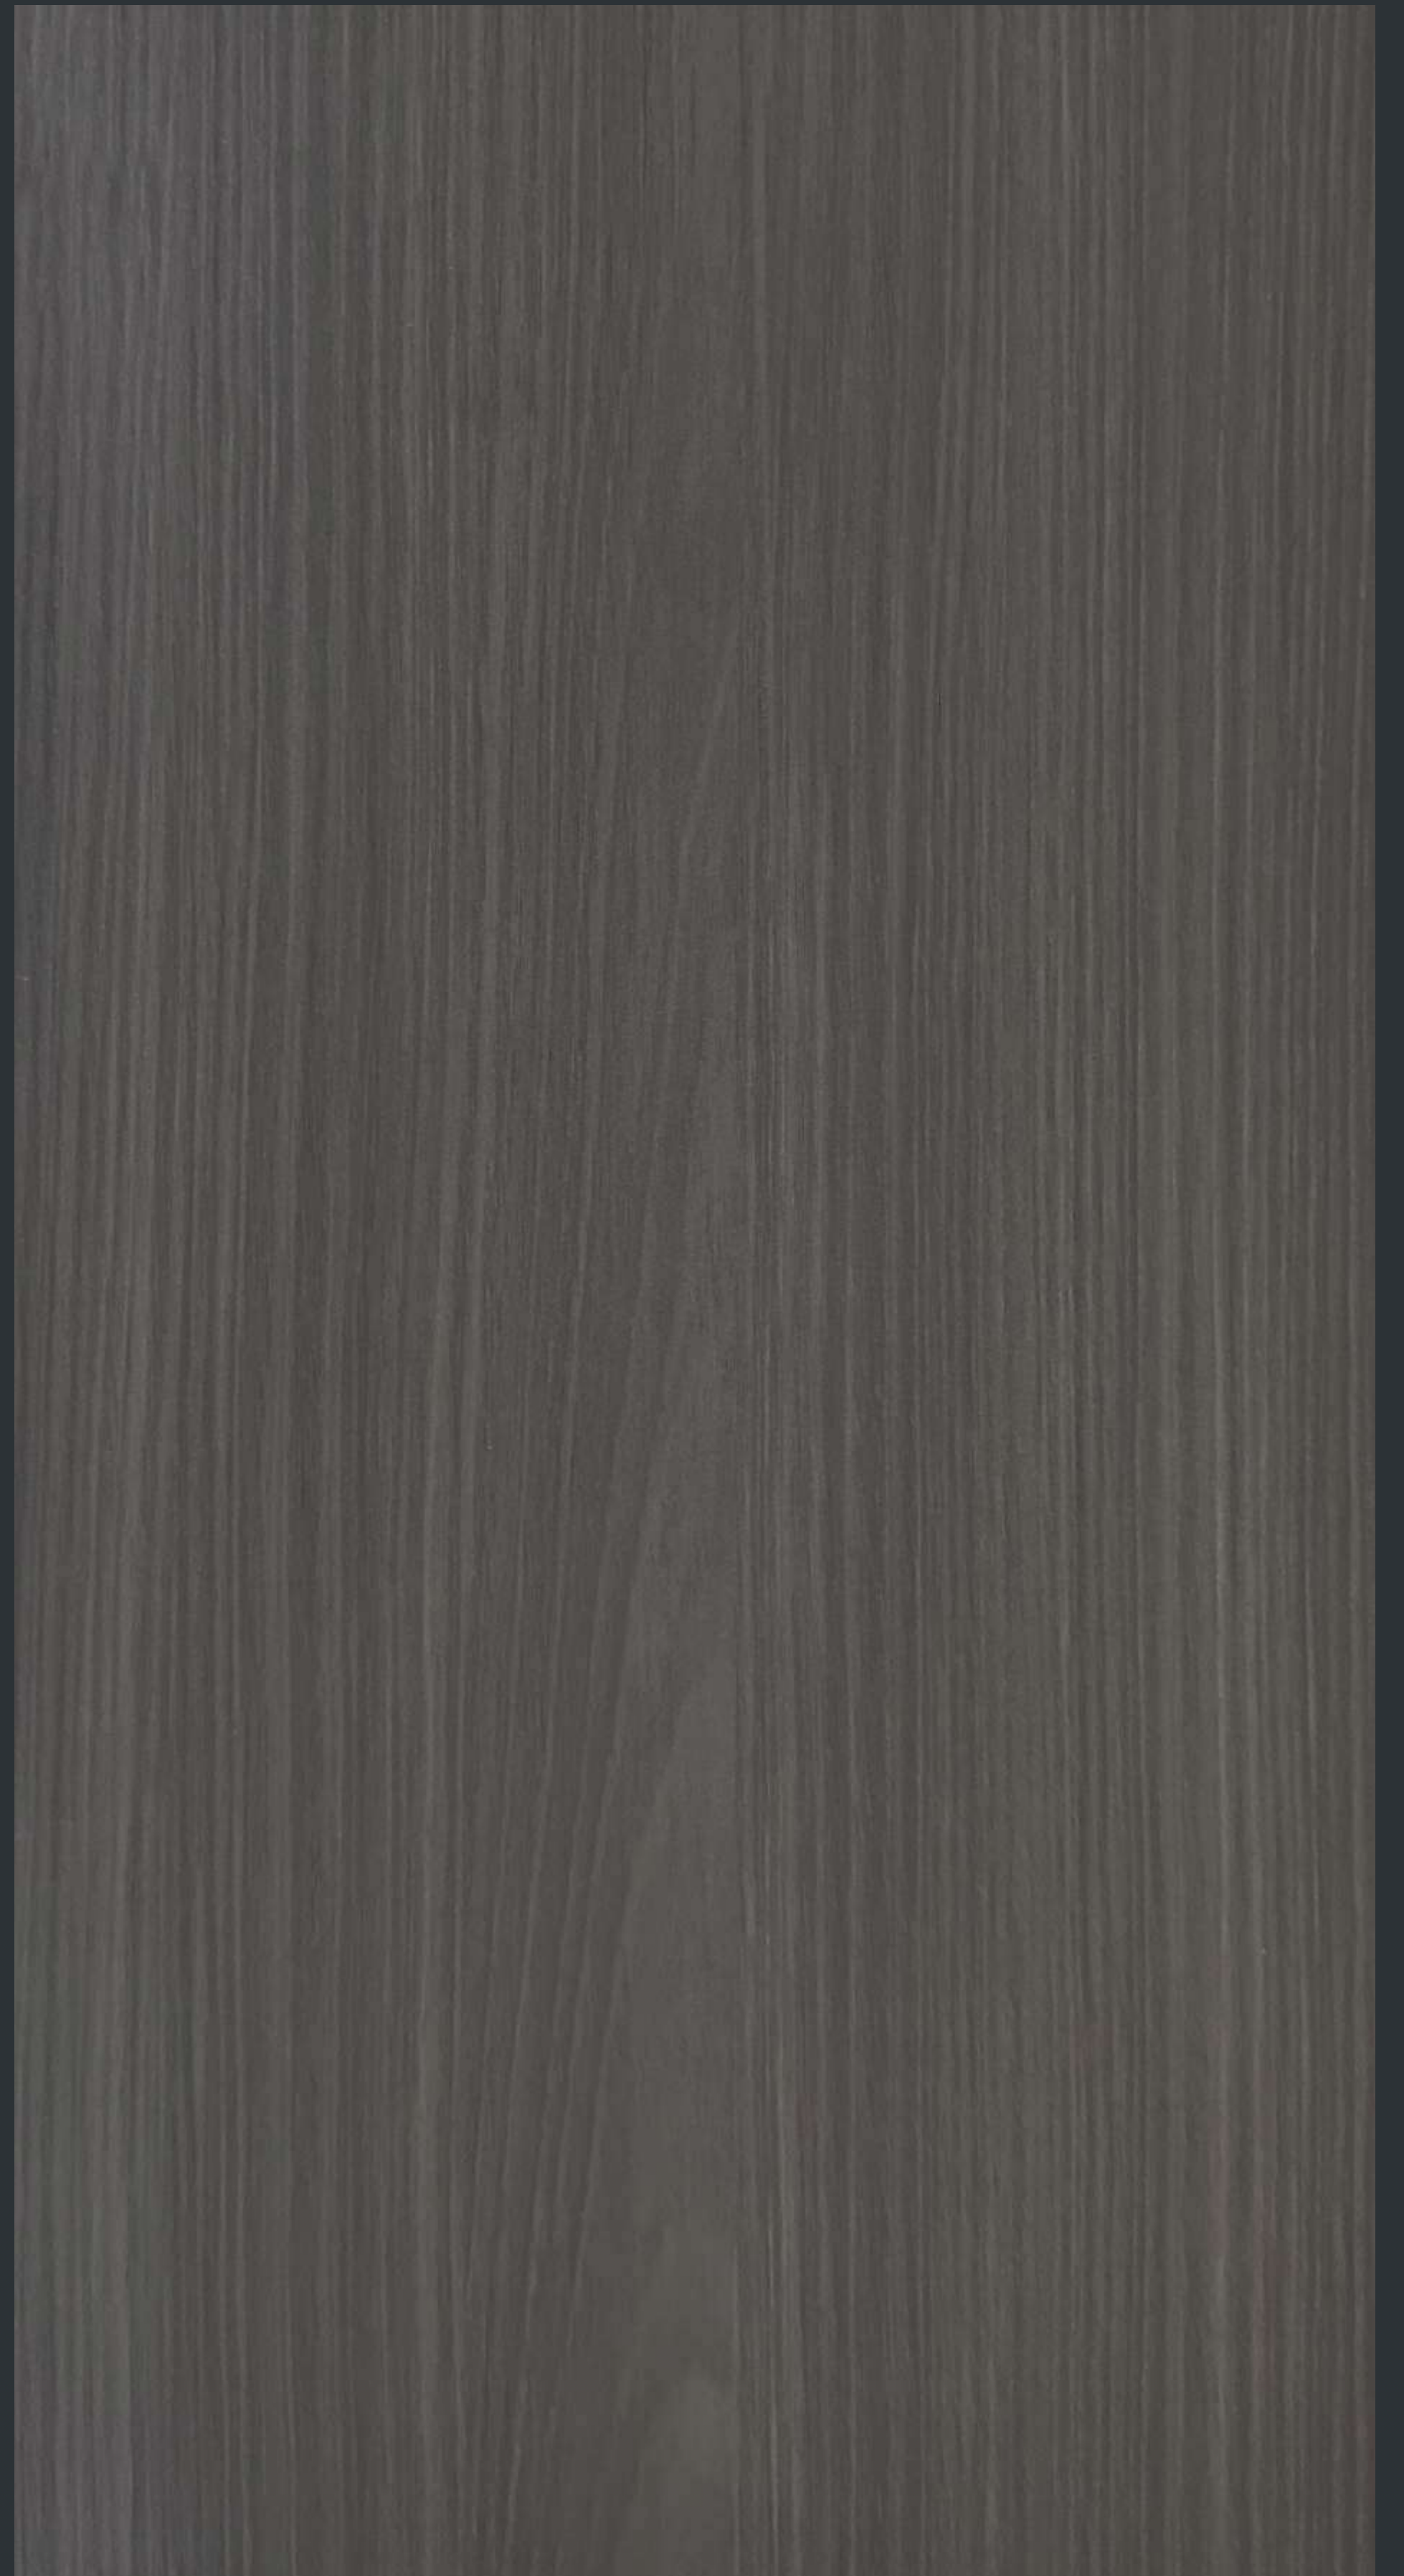

1116-UA



1131-MH



1132-MH




1105-UA



1106-UA




1117-MO

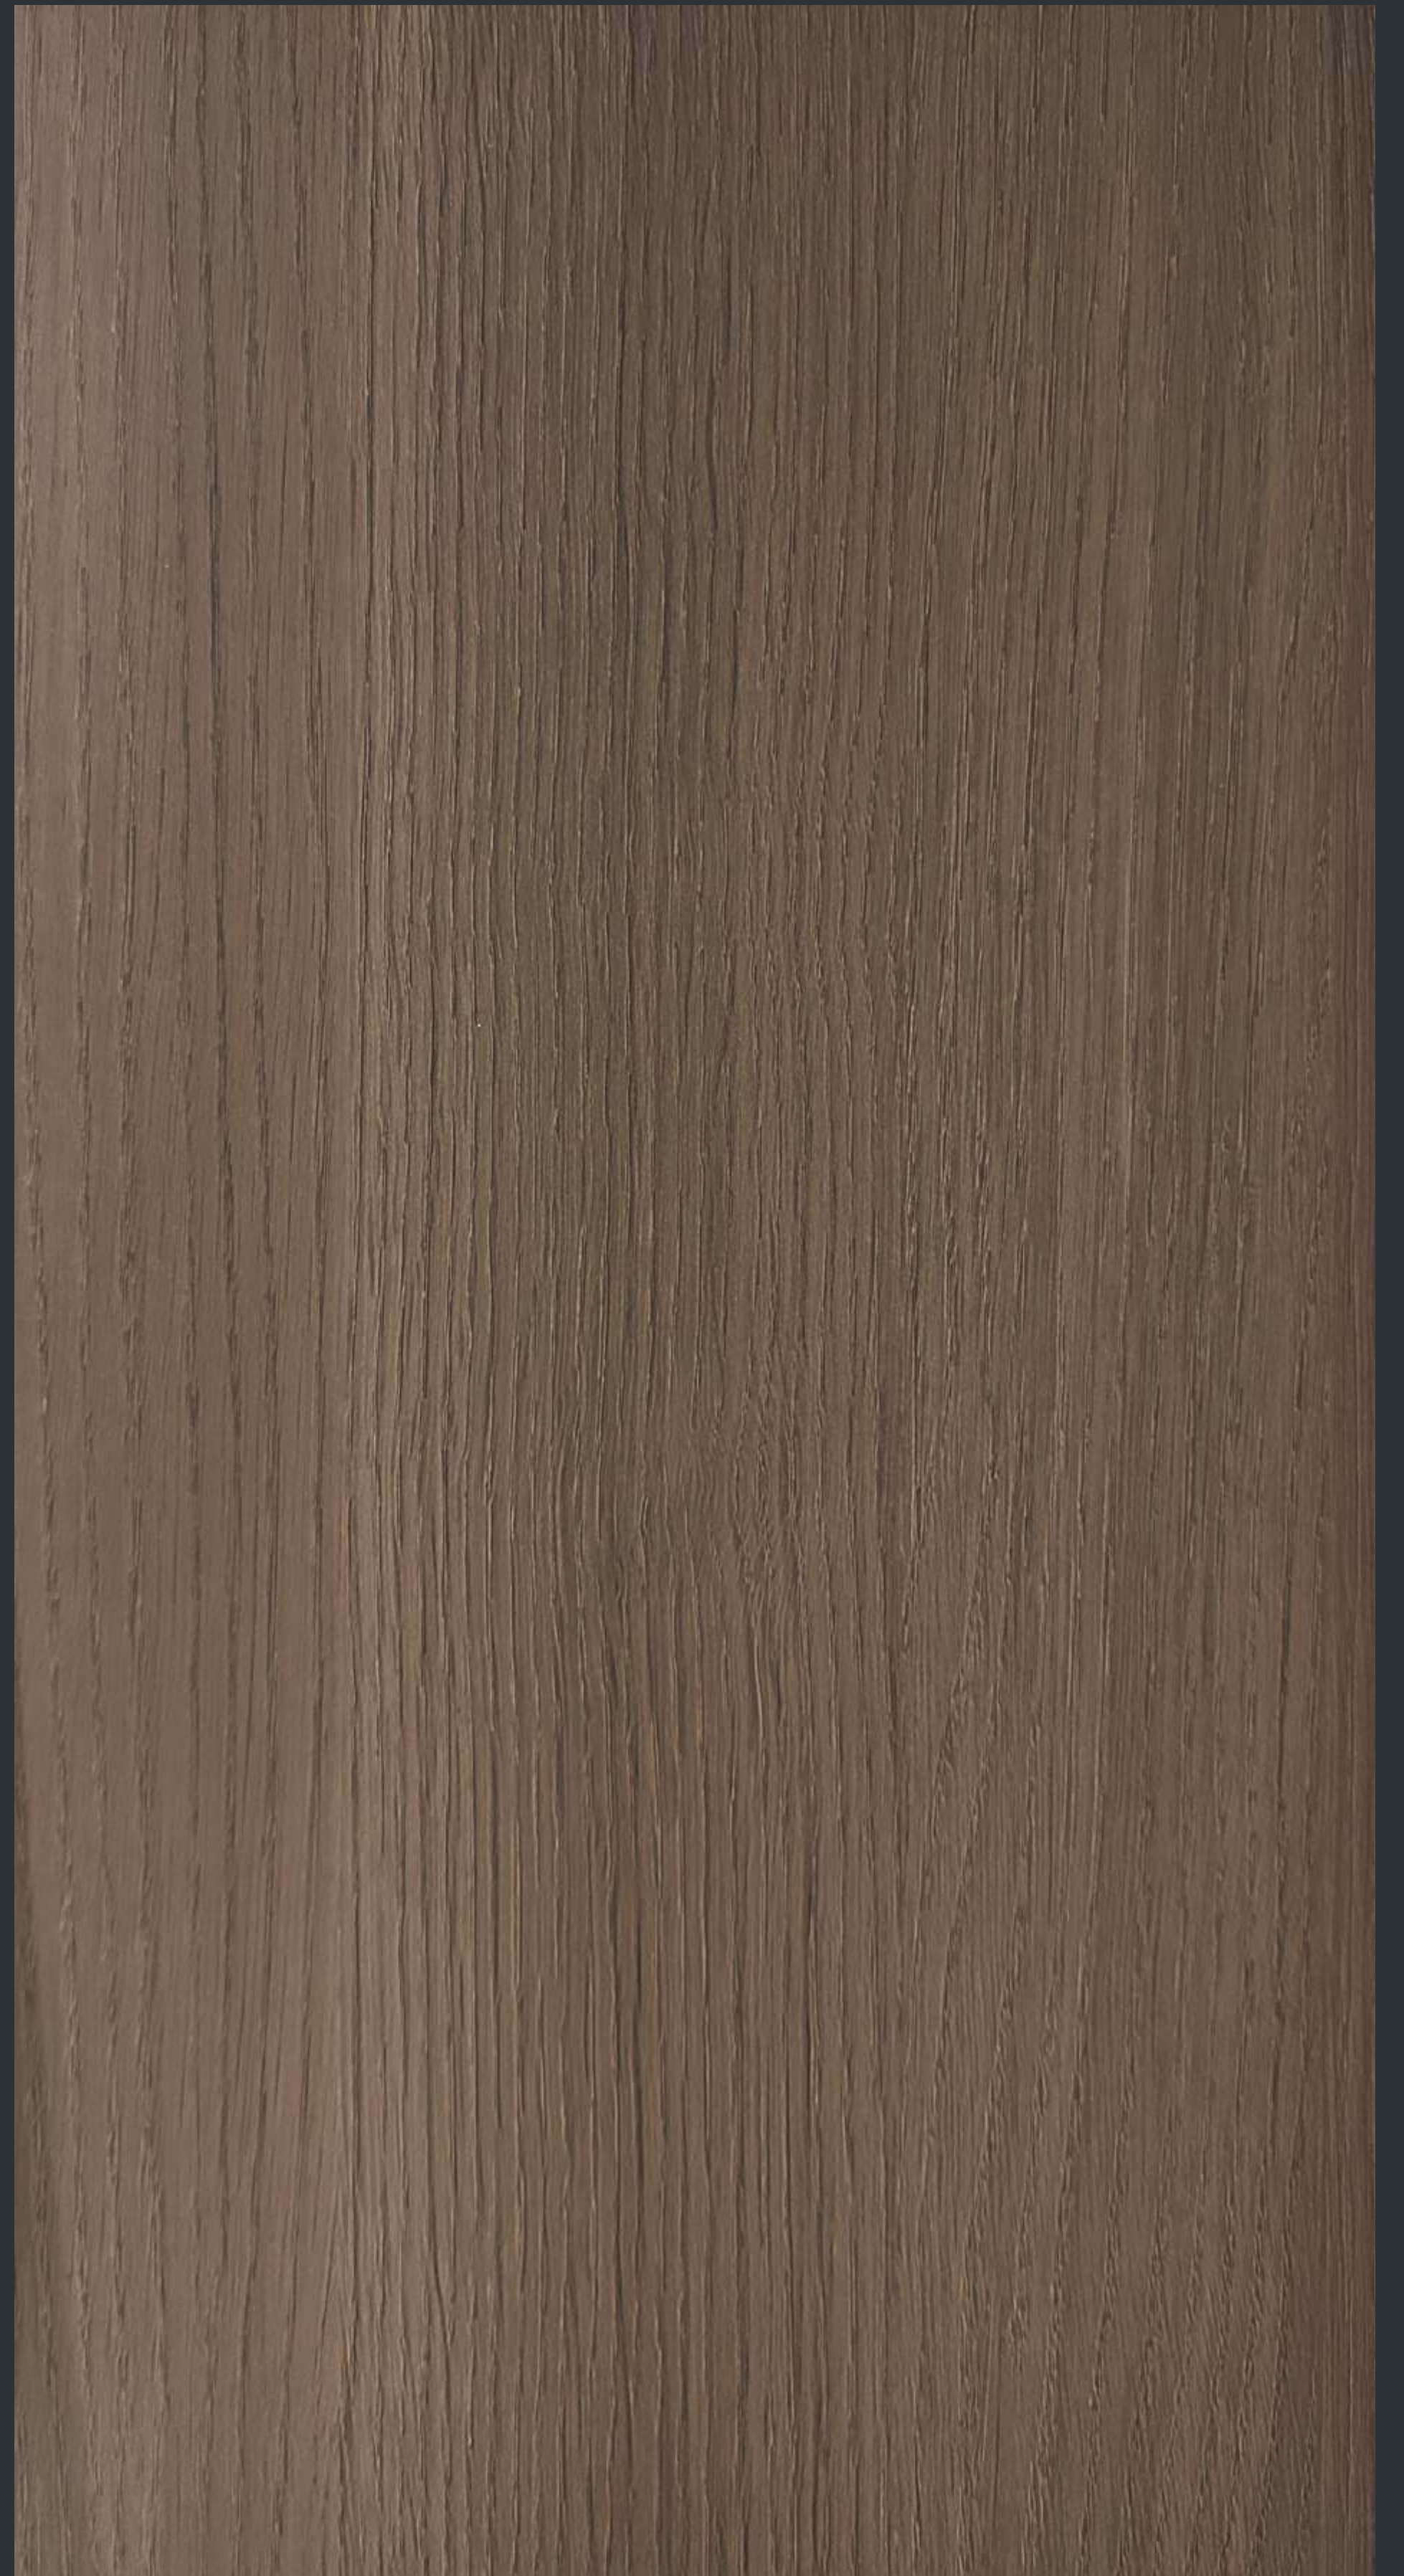

1118-MO




1127-MH

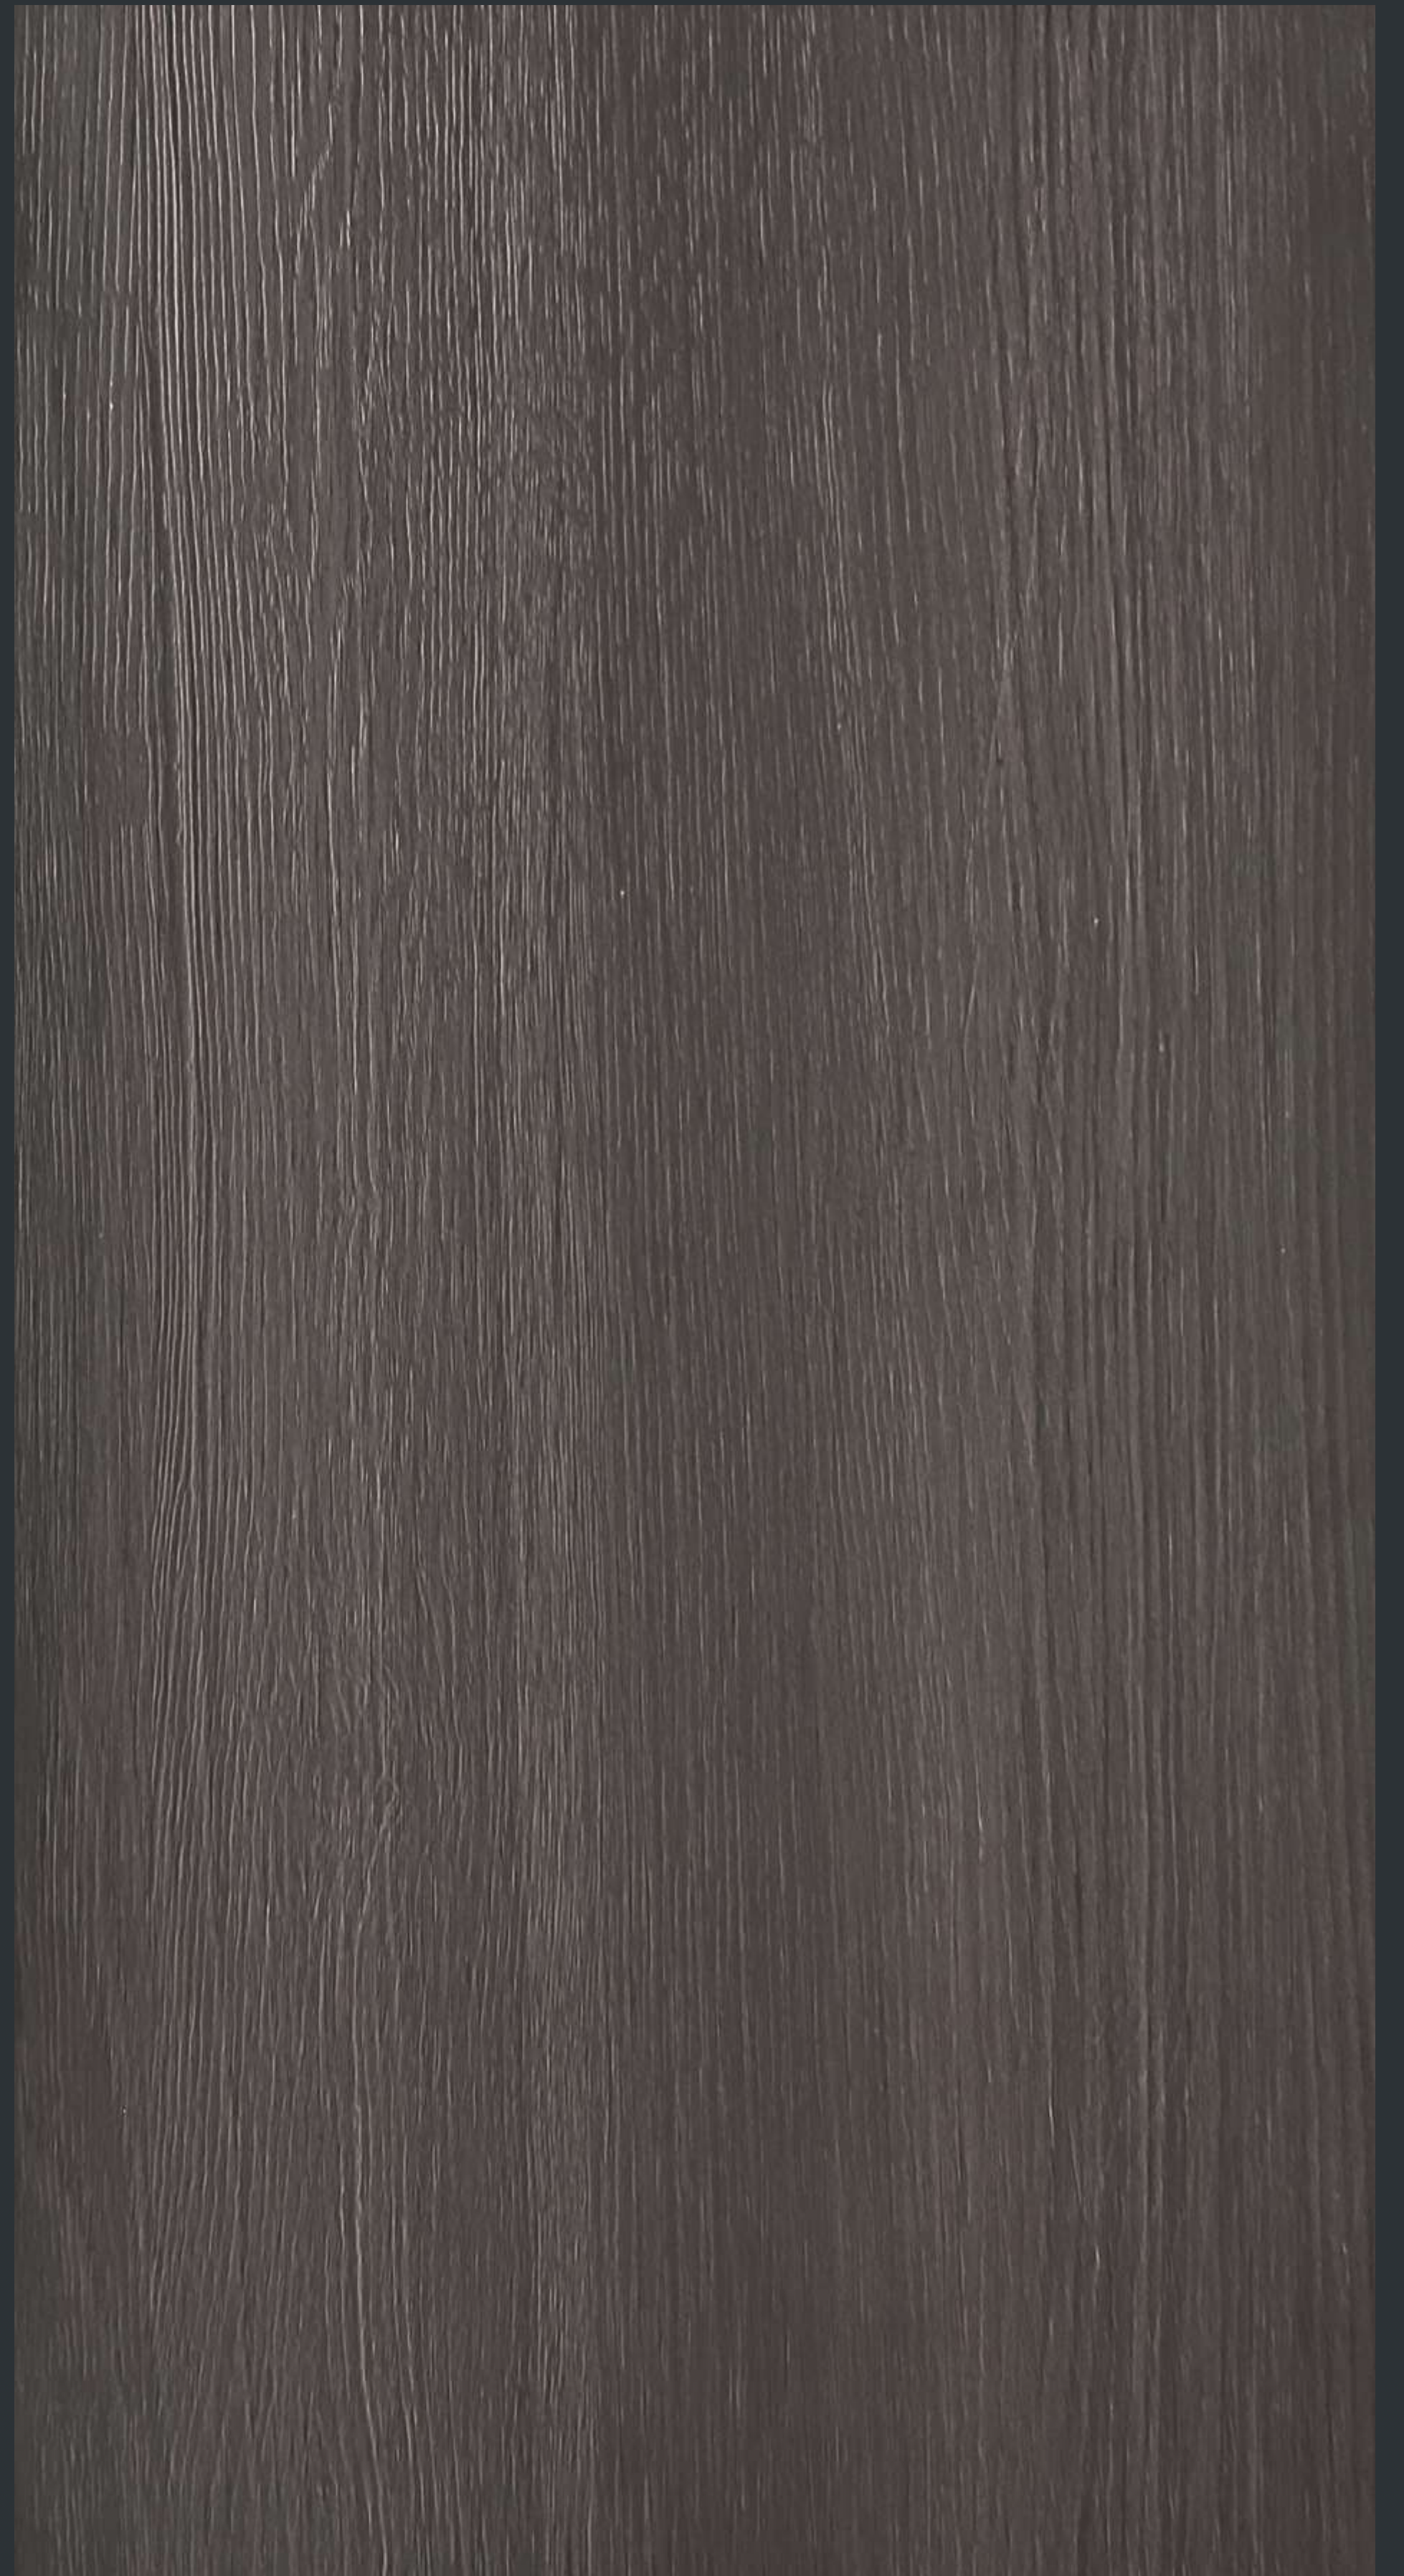

1128-MH




1106-SF

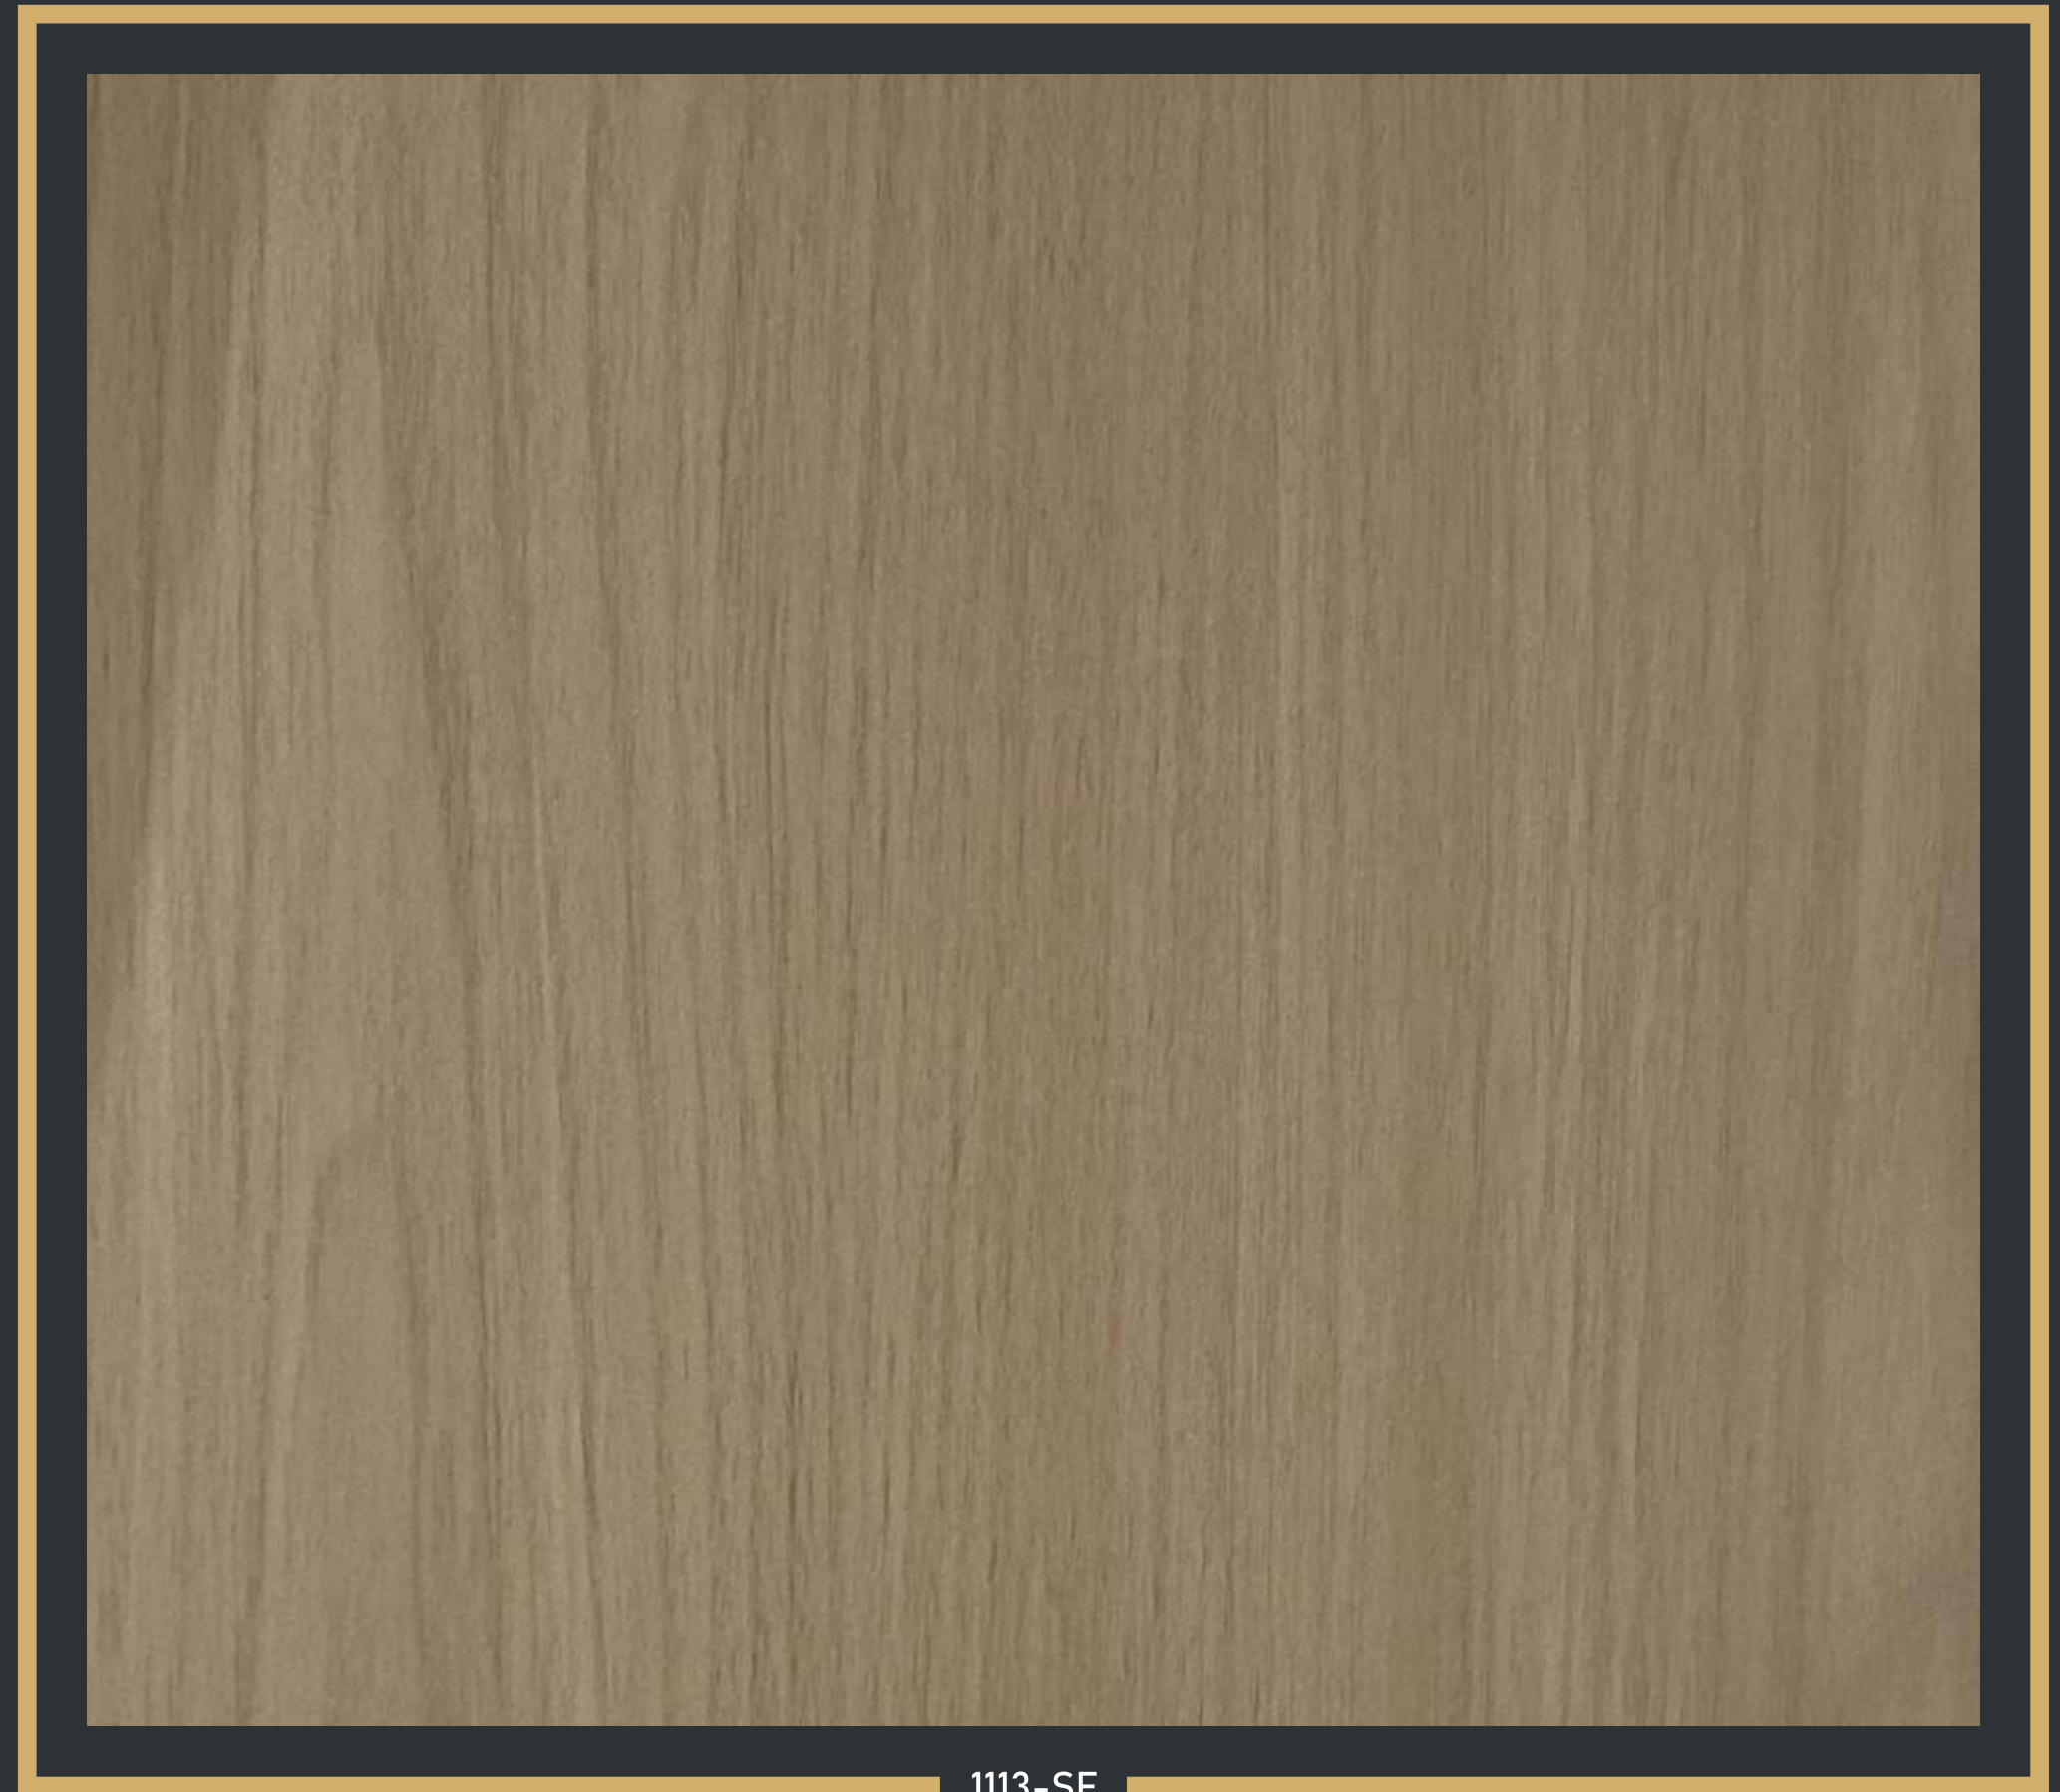


1113-SF




1105-SF

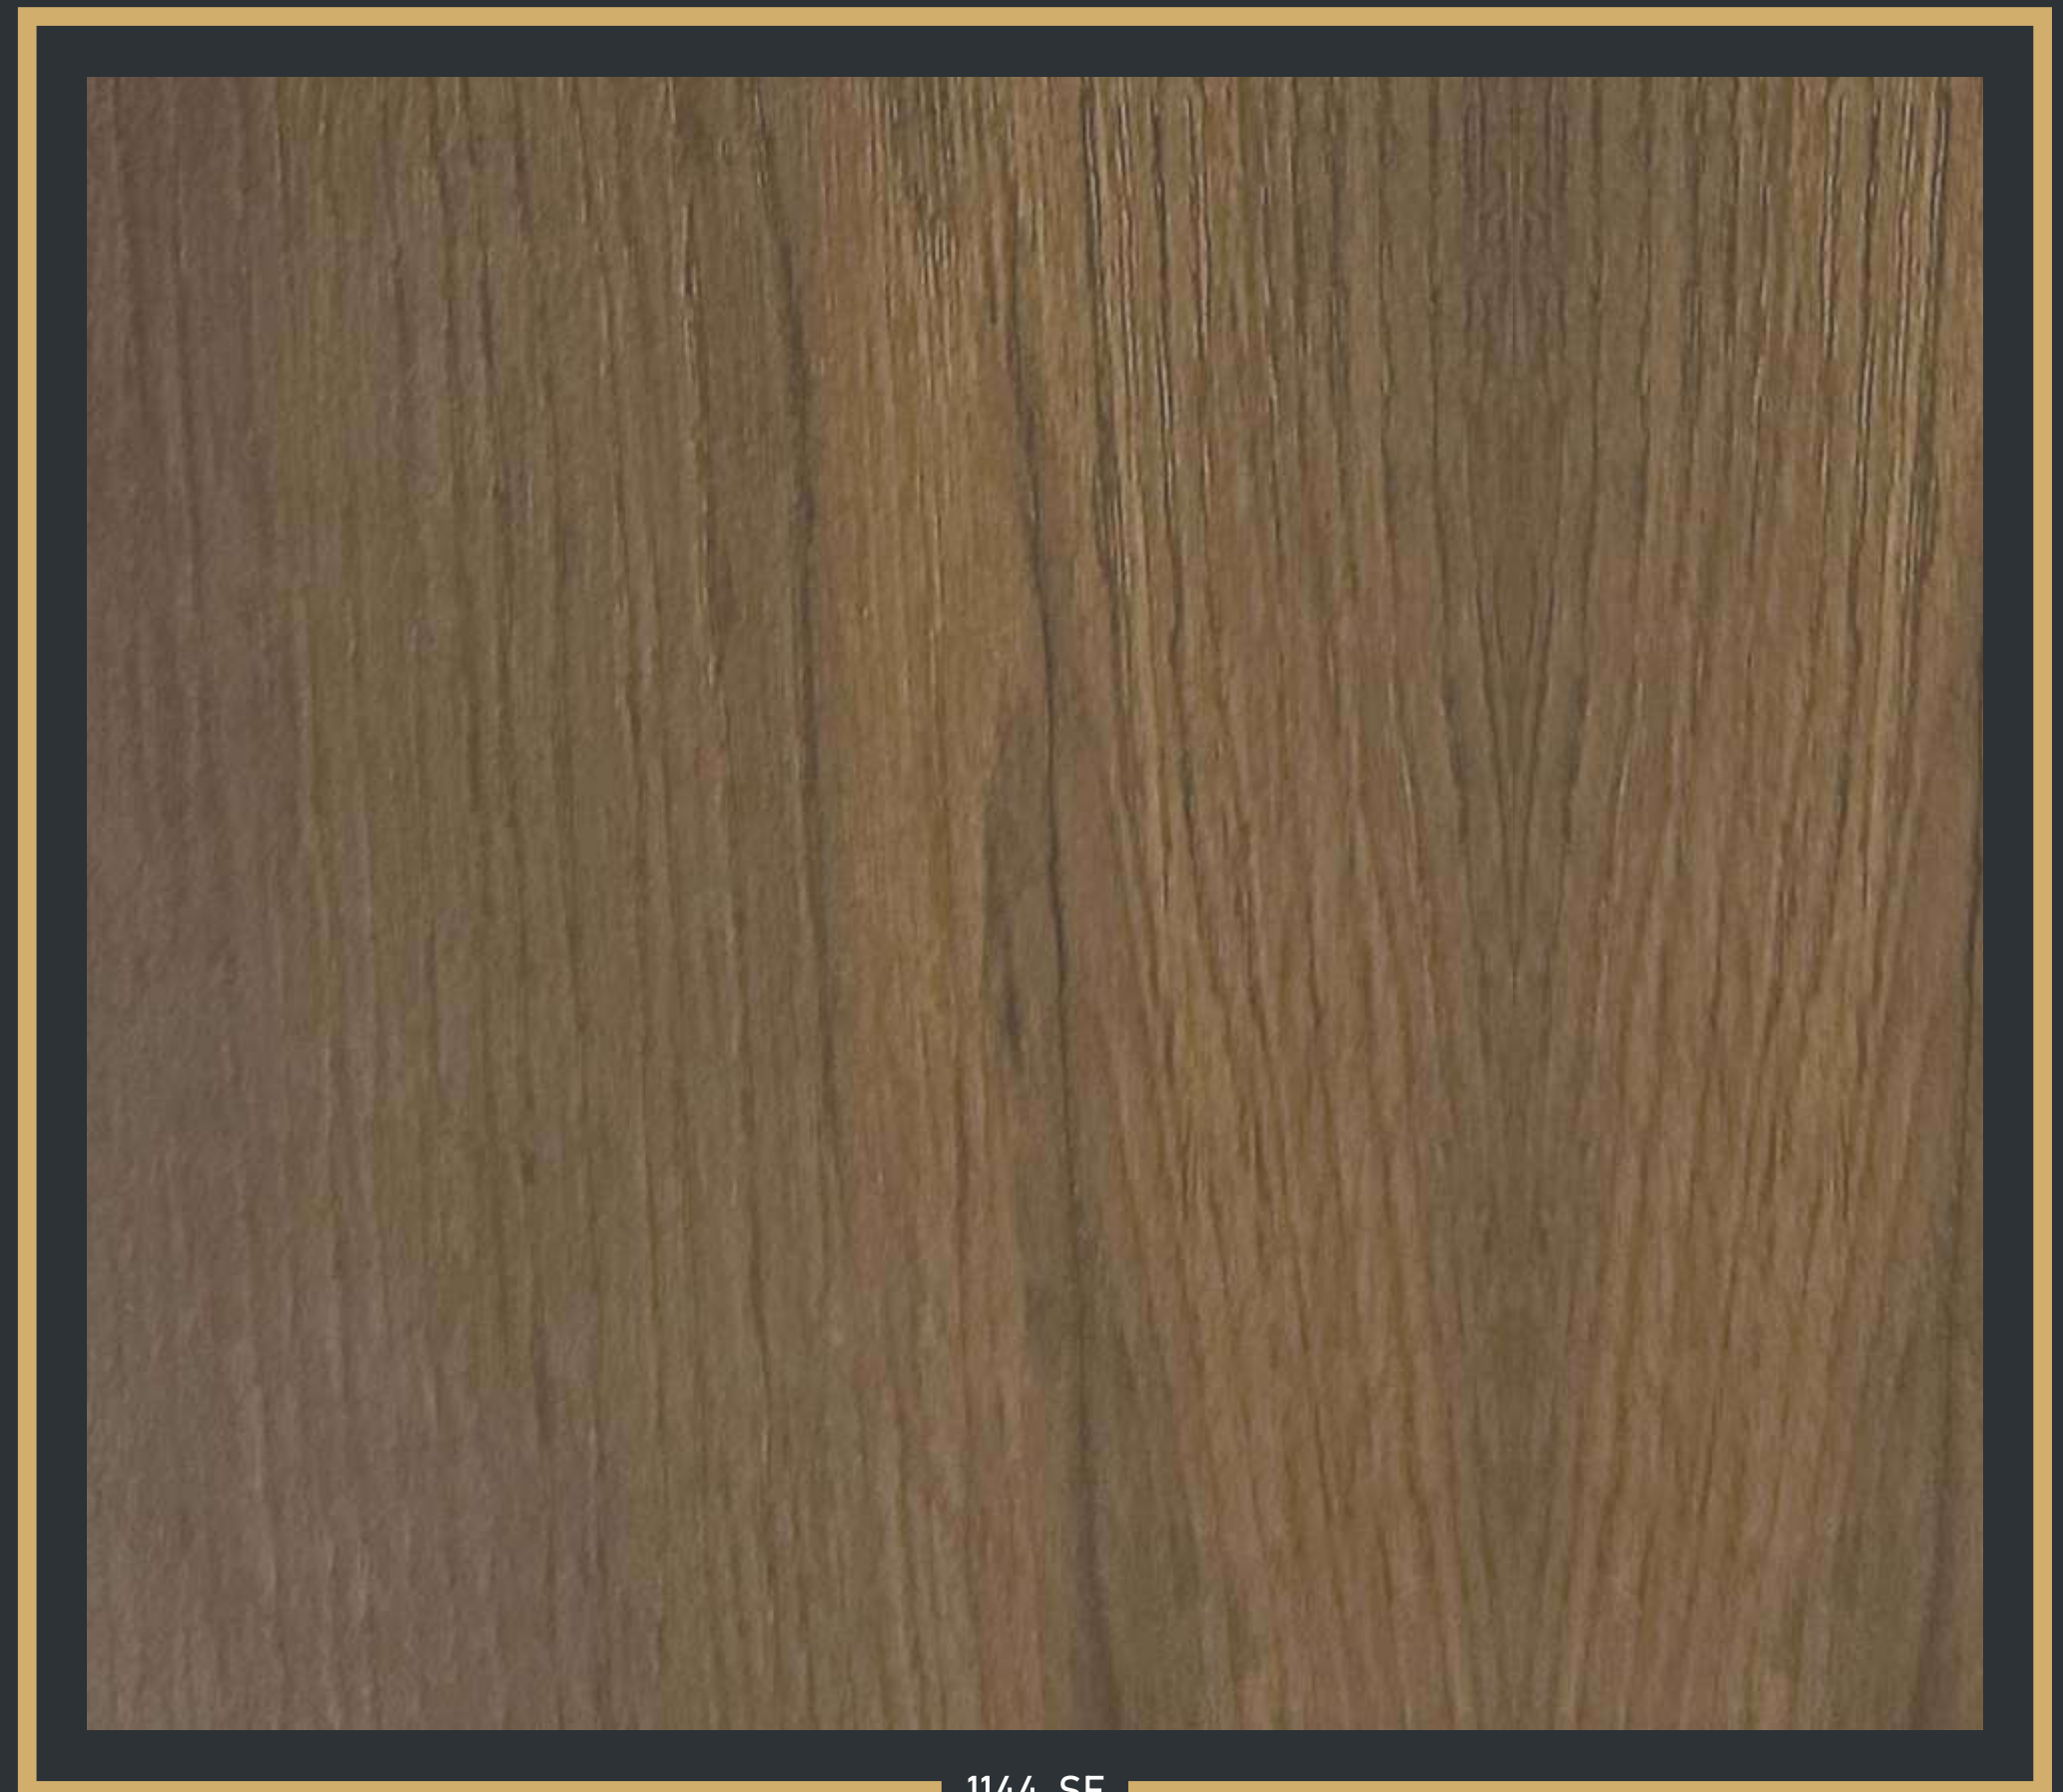

1144-SF

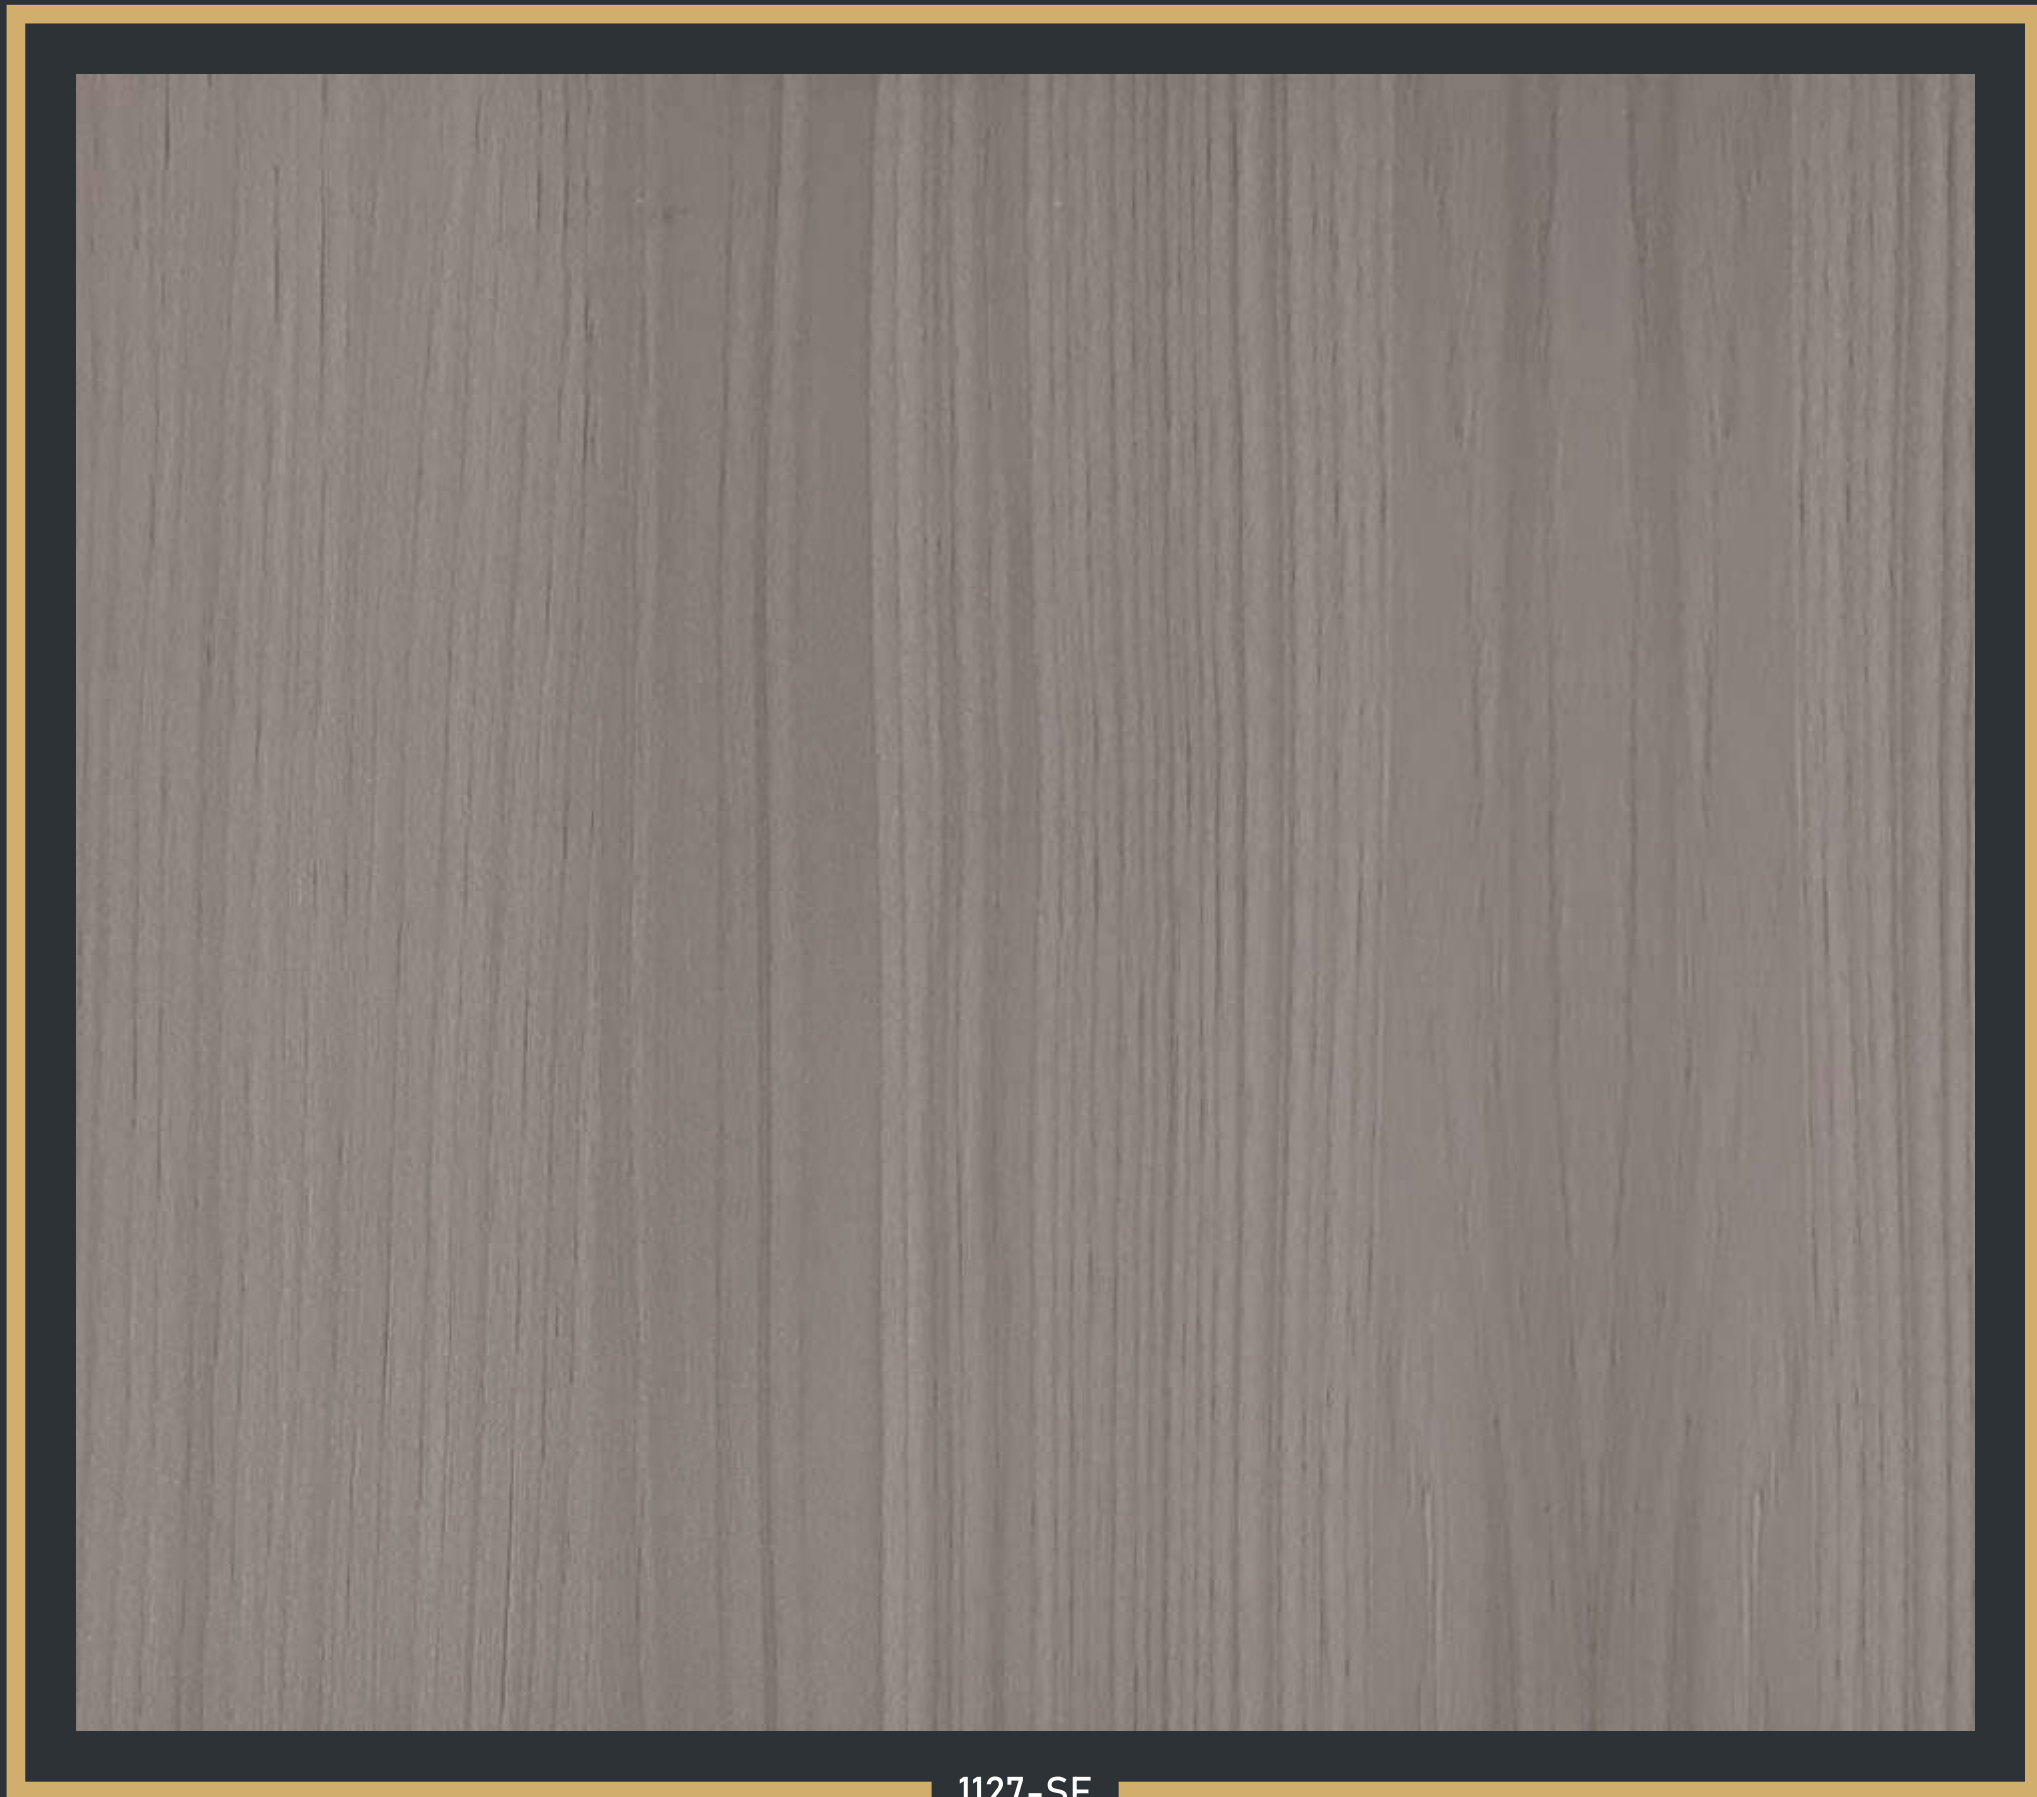

1127-SF

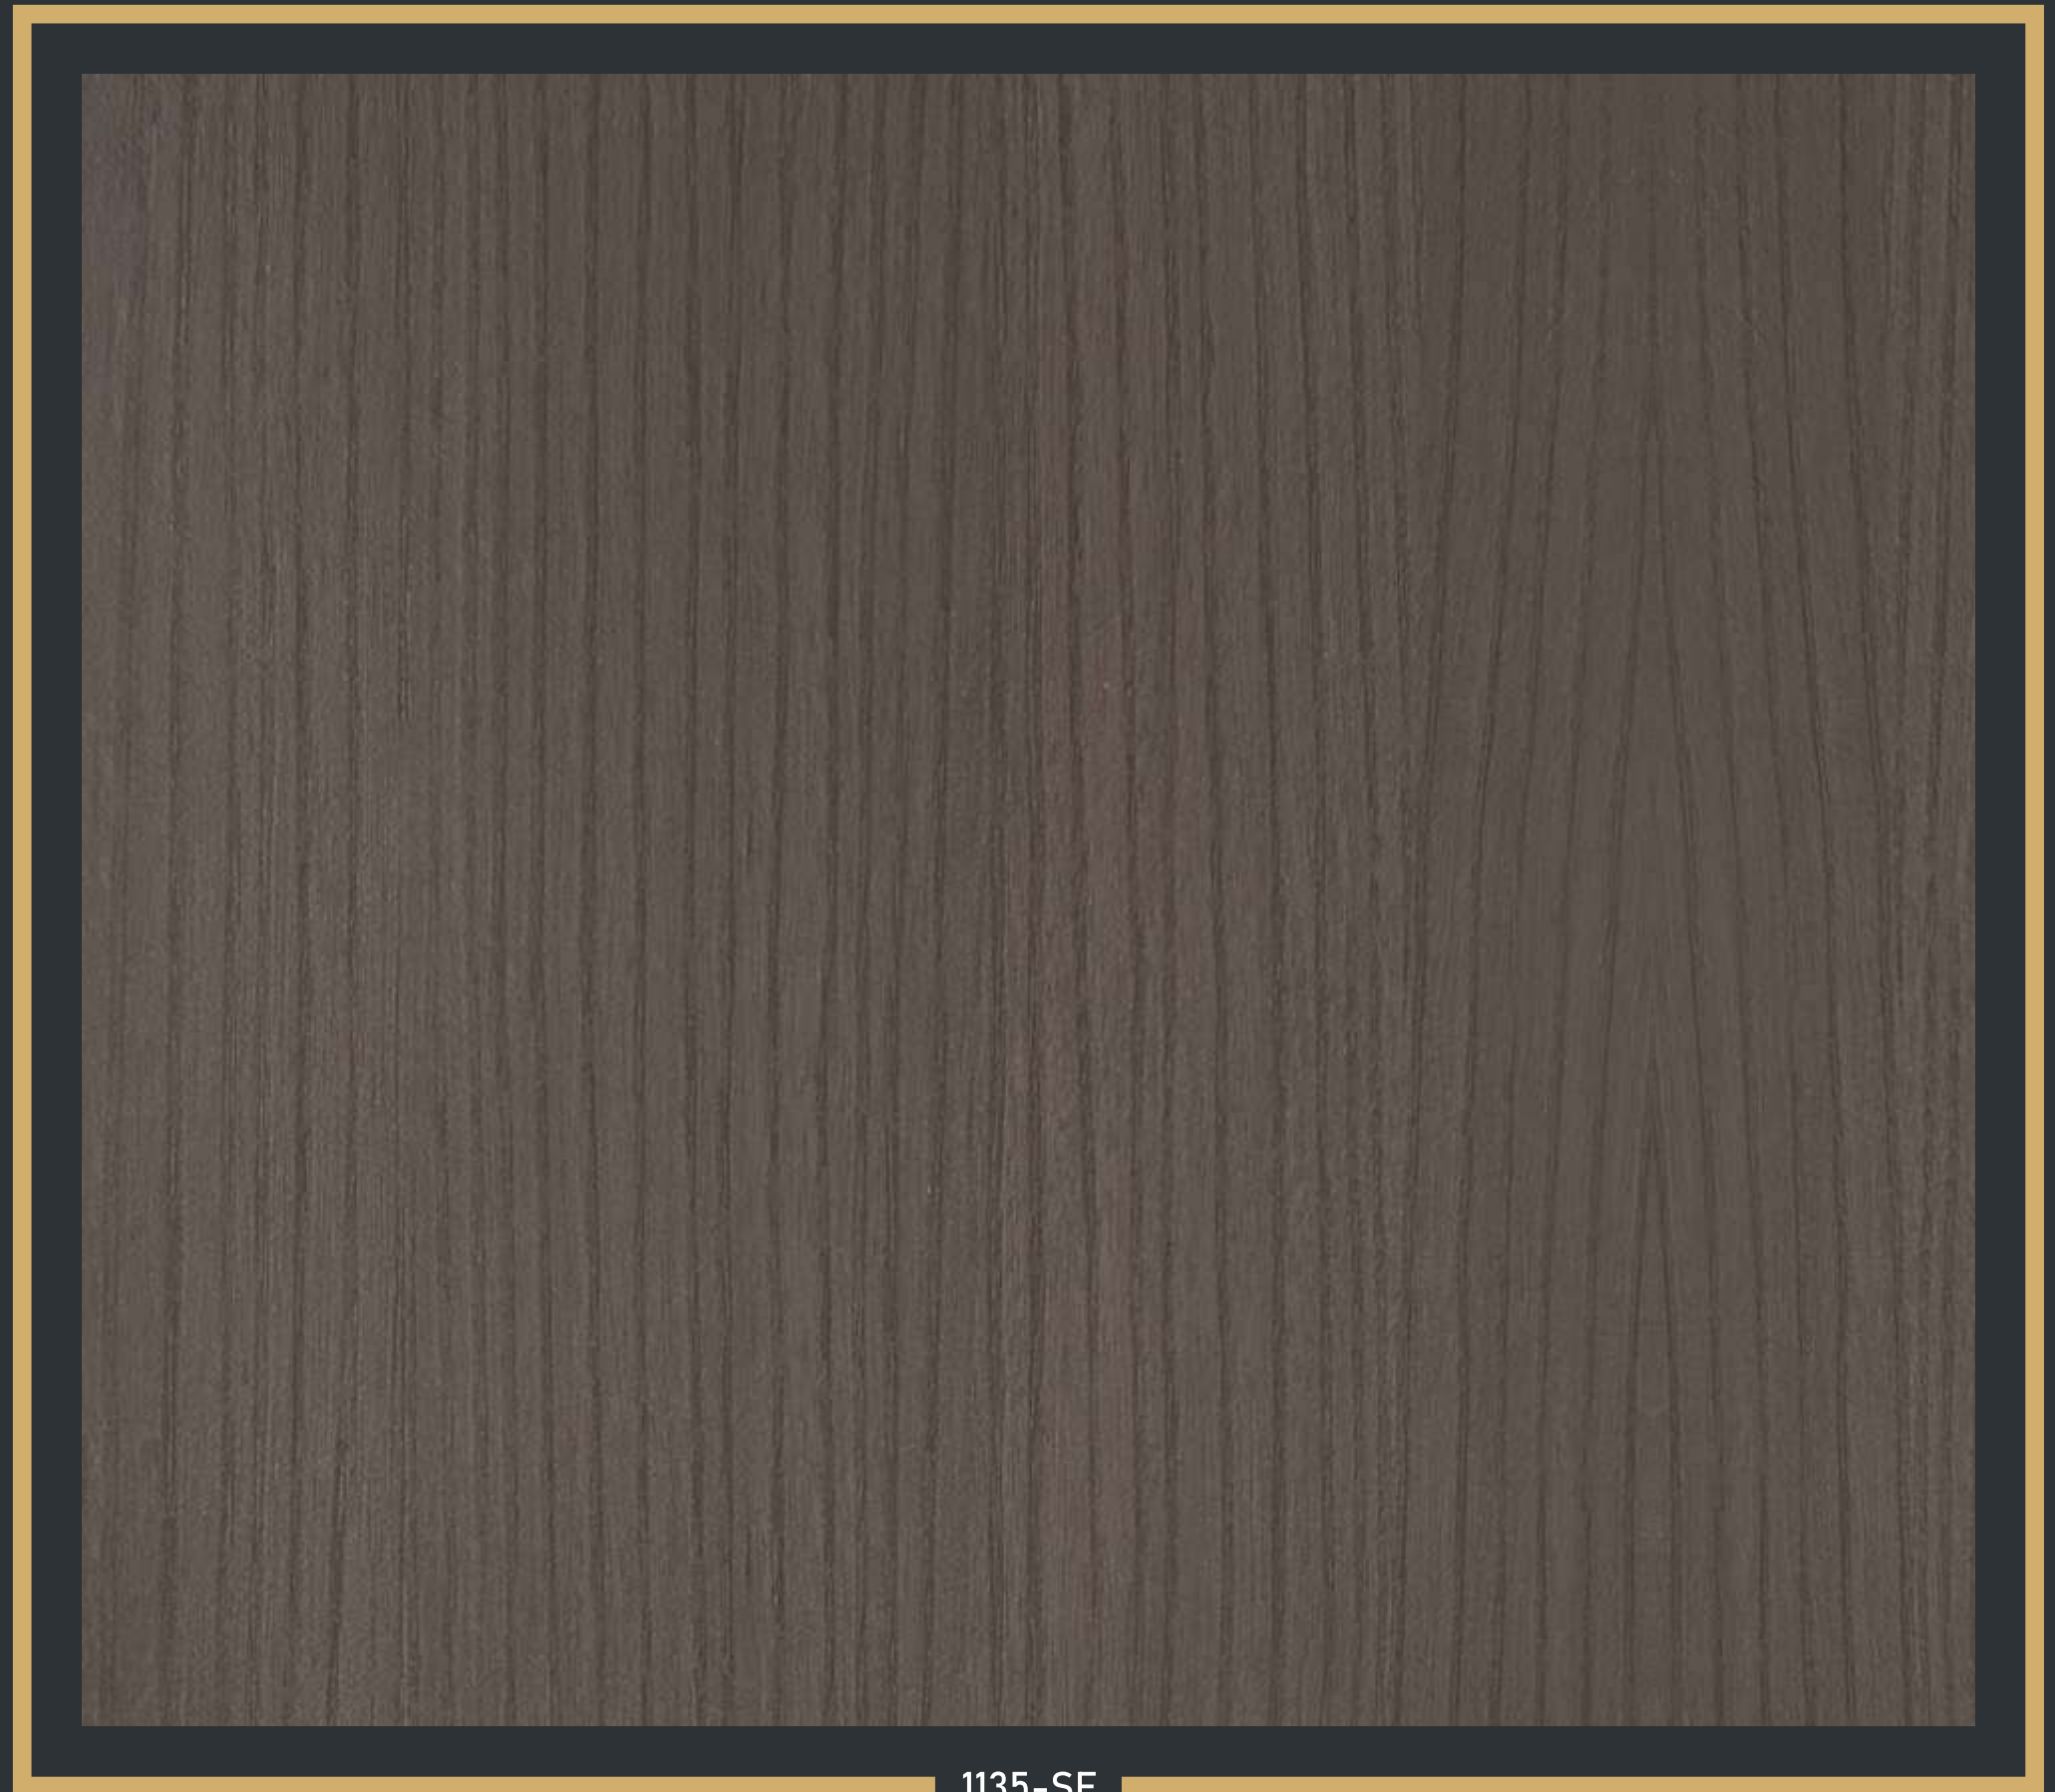

1135-SF



1116-SF



1107-SF

FLUTE (FT)

REAL LEATHER (RL)



894-FT



871-RL



875-FT



876-FT

Surreal style

Characterized by a different surfaces that brightens the modern space with grace.

As it gives a special personality and surface design taste, make a lifestyle like you always wanted.



892-RL



893-RL



893-FT



883-FT



899-RL




883-RL

ACRYLIC SHINE (HG)



ENAMORING

Essence of nature's exotic brilliance

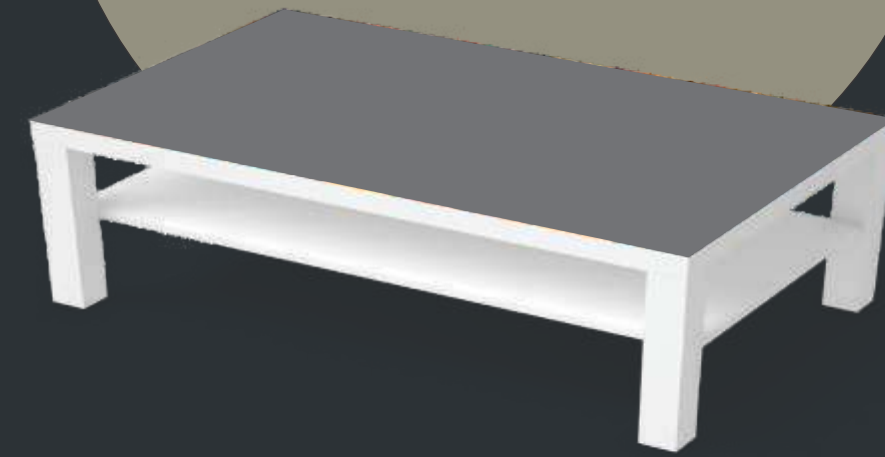

492-HG



491-HG



490-HG




489-HG




487-HG

ACRYLIC SHINE (HG)

SOLID (HG)



885-HG



880-HG



437-HG




893-HG



892-HG




426-HG




890-HG




887-HG




449-HG



456-HG




471-HG




457-HG




876-HG



875-HG



444-HG



895-HG




897-HG



881-HG

Inspiring a
CREATIVE
Platform

SOLID (SMT)



880-SMT




885-SMT



ATTRAC
TIVENESS
combination of colors



893-SMT




892-SMT




897-SMT




881-SMT




874-SMT



876-SMT



890-SMT



887-SMT

INDEX

S. No.	Design No.	Finish	Page No.
1	426	HG	35
2	437	HG	35
3	444	HG	36
4	449	HG	35
5	456	HG	36
6	457	HG	36
7	471	HG	36
8	487	HG	34
9	489	HG	34
10	490	HG	34
11	491	HG	34
12	492	HG	34
13	871	RL	32
14	874	SMT	37
15	875	FT	31
16	875	HG	36
17	876	FT	31
18	876	HG	36
19	876	SMT	37
20	880	HG	35
21	880	SMT	37
22	881	HG	36
23	881	SMT	38
24	883	FT	31
25	883	RL	32
26	885	HG	35
27	885	SMT	37
28	887	HG	35
29	887	SMT	38
30	890	HG	35
31	890	SMT	38
32	892	RL	32
33	892	HG	35
34	892	SMT	37
35	893	FT	31
36	893	RL	32
37	893	HG	35
38	893	SMT	37
39	894	FT	31
40	895	HG	36
41	897	HG	36
42	897	SMT	38
43	899	RL	32
44	1101	SMT	5
45	1102	SMT	6
46	1104	UA	17
47	1105	HG	11
48	1105	UA	21
49	1105	SF	27
50	1106	HG	12
51	1106	UA	22
52	1106	SF	27
53	1107	SF	30
54	1109	FT	15
55	1110	FT	16
56	1113	SF	28
57	1116	HG	14
58	1116	UA	18
59	1116	SF	29
60	1117	MO	23
61	1118	MO	24
62	1127	HG	13
63	1127	MH	25
64	1127	SF	29
65	1128	MH	26
66	1131	MH	19
67	1132	MH	20
68	1135	SF	30
69	1137	HG	3
70	1138	HG	1
71	1138	SMT	2
72	1139	HG	4
73	1140	SMT	8
74	1141	SMT	7
75	1142	FT	10
76	1143	FT	9
77	1144	SF	28

TECHNICAL Specification

PROPERTIES	SPECIFIED VALUES AS PER IS:2046-1995, TYPE S, HGS	TETRA CONFORMS	SPECIFIED VALUES AS PER IS:2046-1995, TYPE S, HGS	TETRA CONFORMS
Resistance to surface wear	350 (Revolutions)	✓	350 (Revolutions)	✓
Resistance to immersion in boiling water				
- Mass Increase (%)	10.0 (Maximum)	✓	7.5 (Maximum)	✓
- Thickness increase (%)	11.8 (Maximum)		8.5 (Maximum)	
- Appearance	Not worse than 4		Not worse than 4	
Resistance to dry heat 180°C	Not worse than 4	✓	Not worse than 4	✓
Dimensional stability at deviated temperature				
- Longitudinal (%)	0.55 (Maximum)	✓	0.44 (Maximum)	✓
- Transverse (%)	1.025 (Maximum)		0.86 (Maximum)	
Dimensional stability at 20°C				
- Longitudinal (%)	0.375 (Maximum)	✓	0.31 (Maximum)	✓
- Transverse (%)	0.60 (Maximum)		0.49 (Maximum)	
Resistance to impact by small diameter ball	20 N (Minimum)	✓	20 N (Minimum)	✓
Resistance to cracking	Not worse than 4	✓	Not worse than 4	✓
Resistance to scratching	2 N (Minimum)	✓	2 N (Minimum)	✓
Resistance to staining	Not worse than 5	✓	Not worse than 5	✓
Resistance to colour change (wood standards)				
- In Xenon arc light	Not worse than 6	✓	Not worse than 6	✓
- In enclosed carbon arc light	Not worse than 5		Not worse than 5	
Resistance to cigarette burns	Not worse than 3	✓	Not worse than 3	✓
Resistance to steam	Not worse than 4	✓	Not worse than 4	✓
Appearance	Should be free from foreign particles	✓	Should be free from foreign particles	✓

FEATURES

A complete dimensionally stable product with the unique resistance power against

- Surface Wear
- Any kind of Stain
- Scratching
- Immersion in Boiling Water
- Cigarette Burns

PRODUCT SPECIFICATIONS

Product: Decorative Laminate Sheets

Size: 2440 x 1220 mm

Thickness: 1.00 mm (± 0.05 mm)

Finish: Matt, Gloss, SF and World Class Textures

Maintenance: Clean with mild soap solutions or household detergent, abrasive cleaners should not be used. It is recommended for vertical use only. Avoid direct sunlight.

Resistance: To surface wear, immersion in boiling water, dry heat, impact by small dia, ball, cigarette burns, staining, scratches, color change in xenon light.

- Guaranteed Thickness.
- High Quality Back Sanding.
- The samples shown in the Shade Chart are only indicative of the colors, patterns, and shades available.
- Company warrants that all its products are free from manufacturing defects and perfectly fit for use under normal conditions. In case of any claims, the liability of the company is however limited to the cost of the product only.

Disclaimer: Customers are advised to reconfirm selected laminate when placing orders as our liability does not include claims arising from sample chip pasting error. Samples presented are indicative of color, pattern and surface finish but not of actual thicknesses. All metallic patterns series recommended for vertical application only. Limited Warranty: BLACK ONYX warrants that its products are reasonably free from manufacturing defects. The products when properly used, will comply, with normal deviation, related manufacturing specifications. This warranty shall be limited only to the original buyer for a period of care. It is recommended that the products must be inspected prior to installation and our liability will be limited to the extent of the cost of the products only. BLACK ONYX products are used for various applications without the possibility of control over the manufacturing of the finished products. The Company does not assume obligations or liabilities arising from the furnishing, sale, installation or repair, use or subsequent sale of any product, to any person or entity.

